



GAZCO

Gas and Electric Stoves



A Warm Welcome

Nothing creates an inviting atmosphere quite like a Gazco stove. The centrepiece of any home, it will add warmth and character to any room or living space – even if you don't have a chimney! Whether you want to achieve a minimalist, contemporary look, or have your heart set on a more traditional stove, this brochure will help you make the perfect choice, whatever your interior tastes.

From the highly efficient contemporary Gas Loft range with all its style and elegance, to the stunning cast iron detail on our traditional Chesterfield stoves, these innovative designs will appeal to any modern or traditional home.

There is also a range of highly realistic, electric log-effect stoves featuring Gazco's Chromalight® technology. These electric versions open up new possibilities such as conservatories, kitchens, dining rooms and bedrooms for you to have the warmth and character of a Gazco stove in your home.





We are proud to have been recognised as an award-winning manufacturer, for our high-quality products and innovative technology. **Find out more at [gazco.com/awards](https://www.gazco.com/awards)**



Contents

The Gazco Pedigree 04
Expert Retailer Network 05

Traditional Stoves.....06 - 07
Chesterfield 508 - 11
Sheraton 512 - 15
Marlborough216 - 19
Stockton20 - 25
Huntingdon26 - 33

Contemporary Styles 34 - 35
Loft36 - 43
Vogue Midi & Midi T44 - 51
Vision52 - 59
CL 3, 5 & 860 - 67
Liberty 8568 - 71
Studio Freestanding Gas72 - 75
Stove Benches76

Balanced Flue Systems 77
Home & Flue Requirements78 - 79
Remote Controls 80
Additional Information 81
Technical Information82 - 93
Other Stoves and Fires 94

Cover Images

Left: Chesterfield 5 Gas.

Right: Loft Gas with Steel Log Store.



The Gazco Pedigree...

Our gas and electric stoves are innovatively designed, solidly built and meticulously tested to ensure they continue to heat your home for many years to come.

Innovation in Design

With creativity and innovation at the heart of what we do, our expert design team continues to create unique, industry leading stoves that both inspire and endure. From the moment the first concept is sketched, through to the mapping of airflow using cutting-edge software, stove design is a science we have been perfecting since 1988.

We continually invest in our research and development facilities to ensure our team is at the forefront of fire design. Our pioneering concepts and technologies make our gas and electric models some of the most sought after stoves available.

Quality Construction

Built with the finest quality materials, each stove is engineered here in the UK. Cast iron and heavy gauge steel are used across our ranges to ensure each stove is built to the highest tolerances. Cast iron allows for the casting of intricate designs, making it perfect for traditional stoves. Heavy gauge steel is also an outstanding choice for stove construction, offering greater scope for design thanks to its versatile nature.

Rigorously Tested

Gazco is an ISO9001 and ISO14001 accredited company. Our rigorous quality control system ensures that all our appliances are safety checked and that they comply with the appropriate regulations, with all stoves in this brochure bearing both the UKCA and CE mark. Similarly, our environmental management systems ensure we work in a sustainable manner, whilst endeavouring to protect the environment by minimising any possible impact from our operations. We are recognised for our continued commitment to technical innovation, high quality products and excellent customer and after-sales care.



Expert Retailer Network

We take great care to ensure that our stoves are designed, tested and manufactured to the highest possible quality and safety standards. We are just as concerned to make certain that they are sold and installed correctly so that you enjoy years of pleasure from your purchase.

Accordingly, you will find our products are only available from experienced, independent retailers who will be happy to show you a selection of models locally in their showrooms, often fully operational. These independent retailers will discuss your individual requirements both technical (such as sizing the heat output to your room and advising on your flue type) and design, and ensure that you select the most appropriate product for your home. These retailers will also be able to advise on, or assist with, the installation process as well as help provide any after-sales support and servicing your appliance may require in the future.

Whilst we encourage our retailers to promote fireplace products and their outlets via the internet, we do not believe suitable levels of customer care and satisfaction can be obtained from purchasing the product only online and we would strongly recommend that you consider this when undertaking your research and making a purchasing decision. Furthermore, please be aware that we do not offer technical support (beyond our statutory responsibilities) to products bought via nationwide online sales, where this support would normally be offered by one of our qualified, independent retailers.

Furthermore, Gazco fires and stoves purchased from within our Expert Retailer Network will have the additional benefit of a greatly extended warranty period, subject to terms and conditions. Full details can be found at www.gazco.com.

You can find and support your nearest retailer by visiting: www.gazco.com/retailers



Warranty

Your Gazco Expert Retailer will provide you with a Two Year Warranty for your new gas or electric stove. The warranty for gas stoves can be extended to a period of five years by registering your stove with Gazco. Please note, these warranties exclude certain consumable parts. Stoves purchased outside of Gazco's Expert Retailer Network will carry a standard One Year non-extendable Warranty or the minimum statutory warranty for your country. Full warranty terms and conditions are available to view at www.gazco.com.



WIN the cost of your product back!

by registering your product online for your free extended warranty. See page 81 for details.



Go to the World



Traditional Stoves

Our traditional stoves combine classic casting details with modern combustion technology. Timelessly styled, they add elegance and character to period and contemporary interiors alike.

| | |
|----------------------|---------|
| Chesterfield 5 | 08 - 11 |
| Sheraton 5 | 12 - 15 |
| Marlborough2 | 16 - 19 |
| Stockton | 20 - 25 |
| Huntingdon | 26 - 33 |

Chesterfield 5 Gas

Tasteful detailing and an elegant Rose Scroll door handle harmonise with clean lines, sweeping curves and an exceptional flame view.



Chesterfield 5 Gas

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control |
|-------------------|--------------------------------|-------------------------|------------------------------|-------------------------|----------------|---------------|----------|-----------------------|--------------------------------------|
| | kW HEAT OUTPUT RANGE | E% EFFICIENCY | E EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | ECHOFLAME BLACK GLASS | FULLY-SEQUENTIAL THERMOSTATIC REMOTE |
| Conventional Flue | 1.60 - 4.00kW | 76% | D | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ Page 80 |
| Balanced Flue | 1.80 - 4.00kW | 90.6% | B | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ Page 80 |

Optional Linerless Flue Kit

This option eliminates the need for the chimney to be fully lined and any associated labour, facilitating a simpler and more cost-effective installation. For more information see page 78.

See page 10 for electric model



Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

SEE IT BURNING AT:
gazco.com/chesterfieldgas





SEE IT BURNING AT:

[gazco.com/chesterfieldelectric](https://www.gazco.com/chesterfieldelectric)



Chesterfield 5 Electric

Our signature Chromalight technology projects captivating flame visuals to appear between the highly realistic log effects, whilst illuminating the fuel bed from above and below.



Chesterfield 5 Electric with Log & Pebble fuel effect and Amber flame setting

| | Heat Output | Interchangeable Fuel Beds | | Lighting Effects | | | Control |
|-------------------------|---------------------------------------|---------------------------|--------------------|----------------------------------|------------------------|------------------------------|--------------------------------------|
| | kW HEAT OUTPUT RANGE | LOG AND PEBBLE | CRYSTAL ICE EFFECT | CHROMALIGHT IMMERSIVE LED SYSTEM | MULTIPLE FLAME EFFECTS | 13 FUEL BED LIGHTING COLOURS | PROGRAMMABLE THERMOSTATIC ECO REMOTE |
| Chesterfield 5 Electric | 0.75 - 1.50kW or flame effect only | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 80 |

See page 8 for gas models

For additional information, specifications and complete model choices, please see pages 82 onwards.

Sheraton 5 Gas

Beautifully made, this timeless stove features cast iron bevelling and corncoring to the door, top plate and base, for aesthetics you can appreciate even when it's off!



Sheraton 5 Gas

TRADITIONAL STOVES

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control |
|-------------------|--------------------------------|-------------------------|------------------------------|-------------------------|----------------|---------------|----------|-----------------------|--------------------------------------|
| | kW HEAT OUTPUT RANGE | E% EFFICIENCY | E EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | ECHOFLAME BLACK GLASS | FULLY-SEQUENTIAL THERMOSTATIC REMOTE |
| Conventional Flue | 1.60 - 4.00kW | 76% | D | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ Page 80 |
| Balanced Flue | 1.80 - 4.00kW | 90.6% | B | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ Page 80 |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

Optional Linerless Flue Kit

This option eliminates the need for the chimney to be fully lined and any associated labour, facilitating a simpler and more cost-effective solution. For more information see page 78.

See page 14 for electric model



See page 4 for additional image

SEE IT BURNING AT:
gazco.com/sheratongas





SEE IT BURNING AT:
[gazco.com/sheratonelectric](https://www.gazco.com/sheratonelectric)



*Sheraton 5 Electric with Log & Pebble fuel effect
and Amber flame setting*

Sheraton 5 Electric

With its mesmerising display, the Sheraton 5 electric lets you mix and match fuel effects to create a bespoke focal point to rival the allure of a real woodburner.



Sheraton 5 Electric with Log & Pebble fuel effect and Amber flame setting with Grafton Limestone mantel

| | Heat Output | Interchangeable Fuel Beds | | Lighting Effects | | | Control |
|---------------------|---------------------------------------|---------------------------|---------------------------|-----------------------------------------|-------------------------------|-------------------------------------|---------------------------------------------|
| | HEAT OUTPUT RANGE | LOG AND PEBBLE | CRYSTAL ICE EFFECT | CHROMALIGHT IMMERSIVE LED SYSTEM | MULTIPLE FLAME EFFECTS | 13 FUEL BED LIGHTING COLOURS | PROGRAMMABLE THERMOSTATIC ECO REMOTE |
| Sheraton 5 Electric | 0.75 - 1.50kW or flame effect only | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 80 |

See page 12 for gas models

For additional information, specifications and complete model choices, please see pages 82 onwards.



SEE IT BURNING AT:

gazco.com/marlborough2gas



Marlborough2 Gas

Country or city, traditional or contemporary, the innovative Gas Marlborough2 has the flexibility to suit your lifestyle and your décor. With their expansive viewing windows, enjoy the dancing flames and warm ambience from the comfort of your sofa.



Small Gas Marlborough2 conventional flue

| | | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control Options (Page 80) | | |
|----------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--|
| |  |  |  |  |  |  |  |  |  |  |  | |
| | HEAT OUTPUT RANGE | EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | VERMICULITE | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE | |
| Small - Conventional Flue |  1.20 - 2.30kW | 76% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Small - Balanced Flue |  1.20 - 2.50kW | 85.1% | C* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Medium - Conventional Flue |  1.80 - 4.80kW | 78% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Medium - Balanced Flue |  2.70 - 5.50kW | 90.8% | B* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |



See page 18 for electric models

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards. * When using Programmable Thermostatic Remote

Marlborough2 Electric

Featuring the same distinctive styling as the gas versions, the Marlborough2 electric offers an amazingly realistic flame effect with or without heat – all at the touch of a button.



Marlborough2 Small Electric with Log & Pebble fuel effect and Amber flame setting



Marlborough2 Medium Electric with Log & Pebble fuel effect and Amber flame setting

| | Heat Output | Interchangeable Fuel Beds | | Lighting Effects | | | Control |
|--------------------------------------|------------------------------------|---------------------------|---------------------------|-----------------------------------------|-------------------------------|-------------------------------------|---------------------------------------------|
| | kW HEAT OUTPUT RANGE | LOG AND PEBBLE | CRYSTAL ICE EFFECT | CHROMALIGHT IMMERSIVE LED SYSTEM | MULTIPLE FLAME EFFECTS | 13 FUEL BED LIGHTING COLOURS | PROGRAMMABLE THERMOSTATIC ECO REMOTE |
| Marlborough2 Electric Small & Medium | 1.00 - 2.00kW or flame effect only | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 80 |

See page 16 for gas models

For additional information, specifications and complete model choices, please see pages 82 onwards.

SEE IT BURNING AT:
gazco.com/marlborough2electric





SEE IT BURNING AT:
gazco.com/stockton2gas



Stockton2 Gas

Using cast iron for the door and heavy gauge steel for the body, Gas Stockton2 stoves combine simple, understated lines with Gazco's superb living flame technology. See page 22 for Stockton 5 model.



Medium Gas Stockton2 conventional flue



Small Gas Stockton2 balanced flue

| | | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control Options (Page 80) | | |
|----------------------------|-------------------|--------------------------|------------------|---------------|-------------------------|---------------|------|-------------|--------|-----------------------------|---------------------------------------|---|
| | | | | | | | | | | | | |
| | HEAT OUTPUT RANGE | EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | VERMICULITE | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE | |
| Small - Conventional Flue | | 1.20 - 2.30kW | 76% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Small - Balanced Flue | | 1.20 - 2.50kW | 85.1% | C* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Medium - Conventional Flue | | 1.80 - 4.80kW | 78% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Medium - Balanced Flue | | 2.70 - 5.50kW | 90.8% | B* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |



See page 24 for electric models

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote



Stockton 5 Gas

With authentic woodburning stove styling, right down to the hinged door with handle, the Gas Stockton 5 is conveniently sized between the small and medium models featured on the previous page.



| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | | Lining | Control Options (Page 80) | | |
|-------------------|--------------------------|------------|------------------|-------------------------|----------------|---------------|----------|-------|--------------------------|---------------------------|-----------------------------|---------------------------------------|
| | HEAT OUTPUT RANGE | EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | COALS | POLISHED STAINLESS STEEL | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE |
| Conventional Flue | 1.40 - 3.00kW | 73% | E | ✓ | ✓ | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Balanced Flue | 2.20 - 3.50kW | 91.8% | B* | ✗ | ✗ | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ |



See page 24 for electric models

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

† Please note this is a viable installation in stone, but not suitable for combustible materials.

* When using Programmable Thermostatic Remote

See page 85 for additional image

Stockton Electric

The Stockton Electric range suits both the modern and traditional home, with classic good looks and a striking three-dimensional flame effect for increased realism.



Stockton2 Medium Electric with Log & Pebble fuel effect and Amber flame setting



Stockton2 Small Electric with Log & Pebble fuel effect and Amber flame setting

| | Heat Output | Interchangeable Fuel Beds | | Lighting Effects | | | Control |
|-----------------------------------------|------------------------------------|---------------------------|--------------------|----------------------------------|------------------------|------------------------------|--------------------------------------|
| | kW HEAT OUTPUT RANGE | LOG AND PEBBLE | CRYSTAL ICE EFFECT | CHROMALIGHT IMMERSIVE LED SYSTEM | MULTIPLE FLAME EFFECTS | 13 FUEL BED LIGHTING COLOURS | PROGRAMMABLE THERMOSTATIC ECO REMOTE |
| Stockton Electric (Small, 5 and Medium) | 1.00 - 2.00kW or flame effect only | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 80 |

See pages 20-23 for gas models

For additional information, specifications and complete model choices, please see pages 82 onwards.

SEE IT BURNING AT:
gazco.com/stocktonelectric



Stockton 5 Electric with Log & Pebble fuel effect and Amber flame setting 25



SEE IT BURNING AT:

gazco.com/huntingdon20gas



Huntingdon 20 Gas

The compact Gas Huntingdon 20's proportions make it perfect for British fireplace openings, whilst the choice of a clear or tracery door further expands the styling options.



Gas Huntingdon 20 with Tracery Door in Matt Black

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Styling Options | | Control Options (Page 80) | | |
|-------------------|--------------------------------|-------------------------|------------------------------|-------------------------|----------------|---------------|----------|-------------|----------------------|------------|---------------------------|-----------------------------|---------------------------------------|
| | kW HEAT OUTPUT RANGE | E% EFFICIENCY | E EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | VERMICULITE | CLEAR & TRACERY DOOR | MATT BLACK | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE |
| Conventional Flue | 1.20 - 2.30kW | 76% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Balanced Flue | 1.20 - 2.50kW | 85.1% | C* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote



See page 32 for electric models

Huntingdon 30 Gas

The Gas Huntingdon 30 offers elegant Gothic styling, and with its beautiful flame picture, provides ample warmth and style to any interior.



Gas Huntingdon 30 with Tracery Door in Matt Black

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Styling Options | | Control Options (Page 80) | | |
|-------------------|--------------------------|------------|------------------|-------------------------|----------------|---------------|----------|-------------|----------------------|------------|---------------------------|-----------------------------|---------------------------------------|
| | HEAT OUTPUT RANGE | EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | VERMICULITE | CLEAR & TRACERY DOOR | MATT BLACK | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE |
| Conventional Flue | 1.50 - 3.10kW | 75% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Balanced Flue | 2.10 - 3.80kW | 95.4% | A* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote

See page 32 for electric models

Gas Huntingdon 30 with Tracery Door in Matt Black

SEE IT BURNING AT:
gazco.com/huntingdon30gas



Huntingdon 40 Gas

The largest model in the Huntingdon range, the Gas Huntingdon 40 is perfectly at home in big open fireplaces or spacious interiors.



Gas Huntingdon 40 with Tracery Door in Matt Black

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Styling Options | | Control Options (Page 80) | | |
|-------------------|--------------------------|------------|------------------|-------------------------|----------------|---------------|----------|-------------|----------------------|------------|---------------------------|-----------------------------|---------------------------------------|
| | HEAT OUTPUT RANGE | EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | VERMICULITE | CLEAR & TRACERY DOOR | MATT BLACK | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE |
| Conventional Flue | 1.80 - 4.80kW | 78% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Balanced Flue | 2.70 - 5.50kW | 90.8% | B* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote

See page 32 for electric models
See page 6 for additional image



SEE IT BURNING AT:
gazco.com/huntingdon40gas



Huntingdon Electric

The fine castings of the Huntingdon Electric range are brought to life with Gazco's Chromalight® Immersive LED System, offering all the fireside ambience of real flames.



Huntingdon 30 Electric with Tracery Door in Matt Black with Log & Pebble fuel effect and Amber flame setting



Huntingdon 20 Electric with Tracery Door in Matt Black with Log & Pebble fuel effect and Amber flame setting

| | Heat Output | Interchangeable Fuel Beds | | Lighting Effects | | | Styling Options | | Control |
|-----------------------------------|------------------------------------|---------------------------|--------------------|----------------------------------|------------------------|------------------------------|----------------------|------------|--------------------------------------|
| | kW HEAT OUTPUT RANGE | LOG AND PEBBLE | CRYSTAL ICE EFFECT | CHROMALIGHT IMMERSIVE LED SYSTEM | MULTIPLE FLAME EFFECTS | 13 FUEL BED LIGHTING COLOURS | CLEAR & TRACERY DOOR | MATT BLACK | PROGRAMMABLE THERMOSTATIC ECO REMOTE |
| Huntingdon Electric (20, 30 & 40) | 1.00 - 2.00kW or flame effect only | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 80 |

For additional information, specifications and complete model choices, please see pages 82 onwards.

See pages 26-31 for gas models

SEE IT BURNING AT:
gazco.com/huntingdonelectric



Huntingdon 40 Electric with Clear Door in Matt Black with Log & Pebble fuel effect and Amber flame setting. Shown with Claremont Limestone Mantel.





Contemporary Stoves

Our contemporary stove collection presents captivating designs with elegant, minimalist styling. Adding a signature piece to any setting these designer stoves feature expansive viewing windows for an uninterrupted view of the flames.

| | |
|---------------------------|---------|
| Loft | 36 - 43 |
| Vogue | 44 - 51 |
| Vision | 52 - 59 |
| CL | 60 - 67 |
| Liberty 85 | 68 - 71 |
| Studio Freestanding | 72 - 75 |

Loft | Gas Stove Range

Clear-cut lines and sleek surfaces ensure the Loft's pure design creates a striking focal point in your interior. Reflective black glass frames the stove's tall firebox, subtly contrasting with the matt steel body. Soaring flames dance amongst a highly realistic fuel bed, composed of hand painted logs which are mirrored on all sides by the EchoFlame™ Black glass lining.



Luxurious Styling Possibilities

Loft stoves can be styled with a variety of accessories. Choose from cleanly styled Plinth and Logstore bases, with either option offered in matching steel, as well as smart Castillo grey sandstone or luxurious Woodgrain sandstone.

There is also a wall mounted version, for an ultra-modern floating installation that lends itself perfectly to contemporary settings. Regardless of the mounting options selected, the stove's height can be accentuated with a striking matching steel top section, hiding the flue pipe and continuing the stove's clean lines.



Loft
 Loft with Steel Plinth
 Loft with Steel Log Store Base
 Loft with Steel Log Store Base and Top Section
 Loft with Optional Wall Mounting Bracket
 Loft with Optional Wall Mounting Bracket and Top Section

| | kW HEAT OUTPUT RANGE | E% EFFICIENCY | E EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | WALL MOUNTING OPTION |
|-------------------|--------------------------------|-------------------------|------------------------------|----------------------|-----------------------|----------------------|-----------------------------|
| Conventional Flue | 2.00 - 4.40kW | 78% | D | ✓ | ✓ | ✗ | ✗ |
| Balanced Flue | 2.40 - 4.50kW | 94.3% | A | ✗ | ✗ | ✓ | ✓ |

Optional Linerless Flue Kit

The Loft is also compatible with our optional linerless flue kit. This eliminates the need for the chimney to be fully lined and any associated labour, facilitating a simpler and more cost effective solution. For information see page 78.



SEE IT BURNING AT:
gazco.com/loft

Loft Gas Steel Styling Options

The Loft can be tailored to your home with a host of styling options including Plinth and Logstore bases in matching matt black steel. A tall hood can also be added to accentuate the stove's height.



Loft with Steel Plinth



| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control | Styling Options | | | | |
|-------------------|--------------------------------|-------------------------|------------------------------|-------------------------|----------------|---------------|----------|-----------------------|----------------------------------|-------------------------------|-------------------|-----------------------------------|----------------------|--------------------|
| | kW HEAT OUTPUT RANGE | E% EFFICIENCY | E EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | ECHOFLAME BLACK GLASS | PROGRAMMABLE THERMOSTATIC REMOTE | STEEL PLINTH & LOG STORE BASE | STEEL TOP SECTION | SANDSTONE PLINTH & LOG STORE BASE | WALL MOUNTING OPTION | STOVE BENCH OPTION |
| Conventional Flue | 2.00 - 4.40kW | 78% | D | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ Page 80 | ✓ Page 37 | ✓ Page 37 | ✓ Page 41 | ✗ | ✓ Page 76 |
| Balanced Flue | 2.40 - 4.50kW | 94.3% | A | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ Page 80 | ✓ Page 37 | ✓ Page 37 | ✓ Page 41 | ✓ Page 42 | ✓ Page 76 |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

See pages 5, 34, 79 for additional images

SEE IT BURNING AT:
gazco.com/loft






SEE IT BURNING AT:
[gazco.com/loft](https://www.gazco.com/loft)



Loft Gas Stone Base Options

The Loft's Plinth and Midline base options are also available in a choice of Castillo or Woodgrain sandstone. Each stone Plinth and Midline base is cut from natural sandstone for a beautifully unique appearance.

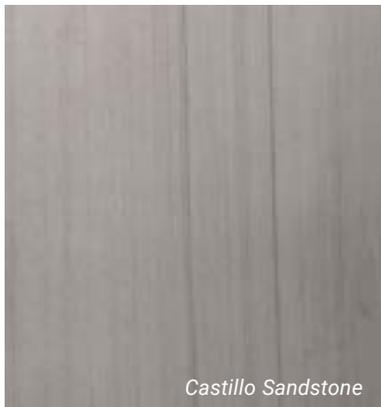

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control | Styling Options | | | | |
|-------------------|--------------------------|------------|------------------|-------------------------|----------------|---------------|----------|-----------------------|----------------------------------|-------------------------------|-------------------|-----------------------------------|----------------------|--------------------|
| | HEAT OUTPUT RANGE | EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | ECHOFLAME BLACK GLASS | PROGRAMMABLE THERMOSTATIC REMOTE | STEEL PLINTH & LOG STORE BASE | STEEL TOP SECTION | SANDSTONE PLINTH & LOG STORE BASE | WALL MOUNTING OPTION | STOVE BENCH OPTION |
| Conventional Flue | 2.00 - 4.40kW | 78% | D | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ Page 80 | ✓ Page 37 | ✓ Page 37 | ✓ Page 41 | ✗ | ✓ Page 76 |
| Balanced Flue | 2.40 - 4.50kW | 94.3% | A | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ Page 80 | ✓ Page 37 | ✓ Page 37 | ✓ Page 41 | ✓ Page 42 | ✓ Page 76 |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

Loft Gas Wall Mounted

The balanced flue Loft can be mounted on the wall to achieve an alternative, 'floating' installation, which can be styled with the matching top section if desired. Top or rear flue options offer further installation versatility.



Loft with optional Wall Mounting Bracket

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control | Styling Options | | | |
|---------------|--------------------------------|-------------------------|------------------------------|-------------------------|----------------|---------------|----------|-----------------------|----------------------------------|-------------------------------|-------------------|-----------------------------------|----------------------|
| | kW HEAT OUTPUT RANGE | E% EFFICIENCY | A EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | ECHOFLAME BLACK GLASS | PROGRAMMABLE THERMOSTATIC REMOTE | STEEL PLINTH & LOG STORE BASE | STEEL TOP SECTION | SANDSTONE PLINTH & LOG STORE BASE | WALL MOUNTING OPTION |
| Balanced Flue | 2.40 - 4.50kW | 94.3% | A | x | x | ✓ | ✓ | ✓ | ✓ Page 80 | ✓ Page 37 | ✓ Page 37 | ✓ Page 41 | ✓ Page 42 |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.



Vogue Midi Gas

Classic-meets-contemporary, the elegant Vogue Midi lends itself to all interior styles with its bevelled edges and refined curves. For increased presence, Midline models offer a woodstore base to complement the woodburning aesthetic.



Gas Vogue Midi Midline

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control Options (Page 80) | | | Styling | Optional Linerless Flue Kit |
|-------------------|--------------------------|------------------|------------------|-------------------------|----------------|---------------|----------|-----------------------|---------------------------|-----------------------------|---------------------------------------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | kW HEAT OUTPUT RANGE | E% EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | ECHOFLAME BLACK GLASS | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE | STOVE BENCH OPTION | |
| Conventional Flue | 1.60 - 4.30kW | 76% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 | <p><i>This option eliminates the need for the chimney to be fully lined and any associated labour, facilitating a simpler, more cost-effective solution. For more details see page 78.</i></p> |
| Balanced Flue | 1.80 - 4.00kW | 90.6% | B* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 | |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote

See page 50 for electric models

SEE IT BURNING AT:
gazco.com/voguemidigas





SEE IT BURNING AT:
gazco.com/voguemitgas



Vogue Midi T Gas

Taking the elegant styling of the smaller Midi range, the Midi T's bevelled cast iron exterior encases a taller firebox that offers a three-sided view of the impressive visuals. This contemporary stove is also available in a Midline version, which features a stylish log store base to add to the wood fire aesthetic.



Gas Vogue Midi T



Gas Vogue Midi T Wall Mounted

| | Heat Output & Efficiency | Chimney or Flue Options | Fuel Bed | Lining | Control Options (Page 80) | Styling Options | Optional Linerless Flue Kit | | | | | | | |
|-------------------|--------------------------------|-------------------------|------------------------------|----------------------|---------------------------|----------------------|-----------------------------|------------------------------|---------------|------------------------------------|-----------------------------------------------------|-----------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | kW HEAT OUTPUT RANGE | E% EFFICIENCY | E EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | ECHOFLAME BLACK GLASS | MANUAL | STANDARD UPGRADEABLE REMOTE | PROGRAMMABLE THERMOSTATIC UPGRADEABLE REMOTE | WALL MOUNTING OPTION | STOVE BENCH OPTION | |
| Conventional Flue | 2.00 - 4.40kW | 78% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✗ | ✓ Page 76 | <i>This option eliminates the need for the chimney to be fully lined and any associated labour, facilitating a simpler, more cost-effective solution. For details see page 78.</i> |
| Balanced Flue | 2.40 - 4.80kW | 94.3% | A* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 | |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote

 See page 50 for electric models



SEE IT BURNING AT:

gazco.com/vogueelectric



Vogue Midi Electric

Available in two models including the Midline log store version, the Vogue Midi offers a choice of fuel beds as standard including logs, pebbles & crystal-effects, letting you mix and match to create a truly bespoke display.



| | Heat Output | Interchangeable Fuel Beds | | Lighting Effects | | | Control | Styling |
|---------------------|------------------------------------|---------------------------|--------------------|----------------------------------|------------------------|------------------------------|--------------------------------------|--------------------|
| | kW HEAT OUTPUT RANGE | LOG AND PEBBLE | CRYSTAL ICE EFFECT | CHROMALIGHT IMMERSIVE LED SYSTEM | MULTIPLE FLAME EFFECTS | 13 FUEL BED LIGHTING COLOURS | PROGRAMMABLE THERMOSTATIC ECO REMOTE | STOVE BENCH OPTION |
| Vogue Midi Electric | 0.75 - 1.50kW or flame effect only | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 80 | ✓ Page 76 |

For additional information, specifications and complete model choices, please see pages 84 onwards.

See page 80 for additional image



See page 44 for gas models

Vogue Midi T Electric

A collection of tall contemporary stoves. Each featuring windows on either side of the stylish stove body to supplement the large front window ensuring the display is visible from almost any angle.



Vogue Midi T Electric with Log & Pebble fuel effects and Amber and Blue accent flame setting.



Vogue Midi T Midline Electric with Log & Pebble Fuel effects and Amber flame setting.



Vogue Midi T Wall Hung Electric with Log & Pebble fuel effects and Amber and Blue accent flame setting.

| | Heat Output | Interchangeable Fuel Beds | | Lighting Effects | | | Control | Styling Options | |
|-----------------------|------------------------------------|---------------------------|------------------------|--------------------------------------|----------------------------|----------------------------------|------------------------------------------|--------------------------|------------------------|
| | kW HEAT OUTPUT RANGE | LOG AND PEBBLE | CRYSTAL ICE EFFECT | CHROMALIGHT IMMERSIVE LED SYSTEM | MULTIPLE FLAME EFFECTS | 13 FUEL BED LIGHTING COLOURS | PROGRAMMABLE THERMOSTATIC ECO REMOTE | WALL MOUNTING OPTION | STOVE BENCH OPTION |
| Vogue Midi T Electric | 0.75 - 1.50kW or flame effect only | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 80 | ✓ | ✓ Page 76 |

For additional information, specifications and complete model choices, please see pages 82 onwards.

See rear cover for additional image

See page 46 for gas models

SEE IT BURNING AT:
[gazco.com/voguemiditelectric](https://www.gazco.com/voguemiditelectric)



Vogue Midi T Electric with Log & Pebble
Fuel effects and Amber flame setting *



SEE IT BURNING AT:
gazco.com/visionsmallgas



Vision Small Gas

The Gas Vision Small offers beautiful, contemporary aesthetics in a neat package – well suited to standard chimney openings thanks to its compact proportions.



Gas Vision Small on 100 Low Bench

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control Options (Page 80) | | | Styling |
|-------------------|--------------------------|------------|------------------|-------------------------|----------------|---------------|----------|-------------|---------------------------|-----------------------------|---------------------------------------|--------------------|
| | HEAT OUTPUT RANGE | EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | VERMICULITE | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE | STOVE BENCH OPTION |
| Conventional Flue | 1.20 - 2.30kW | 76% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |
| Balanced Flue | 1.20 - 2.50kW | 85.1% | C* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |



See page 58 for electric models

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote



SEE IT BURNING AT:
gazco.com/visionmidigas



Vision Midi Gas

With its pure lines and stylish black glass surfaces, the Gas Vision Midi brings the age old concept of the stove into the present day, offering wood fire ambience with clean, modern styling.



Gas Vision Midi

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control Options (Page 80) | | | Styling |
|-------------------|--------------------------|------------|------------------|-------------------------|----------------|---------------|----------|-------------|---------------------------|-----------------------------|---------------------------------------|--------------------|
| | HEAT OUTPUT RANGE | EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | VERMICULITE | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE | STOVE BENCH OPTION |
| Conventional Flue | 1.50 - 3.10kW | 75% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |
| Balanced Flue | 2.10 - 3.80kW | 95.4% | A* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |



See page 58 for electric models

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote

Vision Medium Gas

The Gas Vision Medium is the largest model in the Vision range with a powerful heat output to match, making it a great choice for installing into expansive inglenook fireplaces or bigger rooms.



| | Heat Output & Efficiency | | | Chimney or Flue Options | | | | Fuel Bed | Lining | Control Options (Page 80) | | | Styling |
|-------------------|--------------------------|------------|------------------|-------------------------|----------------|---------------|------|-------------|--------|-----------------------------|---------------------------------------|--------------------|---------|
| | HEAT OUTPUT RANGE | EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | VERMICULITE | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE | STOVE BENCH OPTION | |
| Conventional Flue | 1.80 - 4.80kW | 78% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 | |
| Balanced Flue | 2.70 - 5.50kW | 90.8% | B* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 | |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote



See page 58 for electric models

SEE IT BURNING AT:
gazco.com/visionmediumgas



SEE IT BURNING AT:
gazco.com/visionelectric



Vision Electric

The Vision is a contemporary, electric, with each size sporting a highly reflective black glass door, integral glass plinth, black glass top plate and stainless steel detailing for a clean stylish look.



| | Heat Output | Interchangeable Fuel Beds | | Lighting Effects | | | Control | Styling |
|--------------------------------------|------------------------------------|---------------------------|--------------------|----------------------------------|------------------------|------------------------------|--------------------------------------|--------------------|
| | HEAT OUTPUT RANGE | LOG AND PEBBLE | CRYSTAL ICE EFFECT | CHROMALIGHT IMMERSIVE LED SYSTEM | MULTIPLE FLAME EFFECTS | 13 FUEL BED LIGHTING COLOURS | PROGRAMMABLE THERMOSTATIC ECO REMOTE | STOVE BENCH OPTION |
| Vision Electric Small, Midi & Medium | 1.00 - 2.00kW or flame effect only | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |

For additional information, specifications and complete model choices, please see pages 82 onwards.

See page 52-57 for gas models



SEE IT BURNING AT:
gazco.com/cl3gas



CL3 Gas

The compact CL3 brings charm to any interior and is perfect for smaller rooms or narrow inglenooks – or anywhere you need to add a little heat and ambience.



CL3 Gas

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control Options (Page 80) | | | Styling |
|-------------------|--------------------------------|-------------------------|------------------------------|-------------------------|----------------|---------------|----------|-------------|---------------------------|-----------------------------|---------------------------------------|--------------------|
| | kW HEAT OUTPUT RANGE | E% EFFICIENCY | E EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | VERMICULITE | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE | STOVE BENCH OPTION |
| Conventional Flue | 1.20 - 2.30kW | 76.0% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |
| Balanced Flue | 1.20 - 2.50kW | 85.1% | C* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |




See page 66 for electric models

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote

CL5 Gas

Effortlessly bridging the gap between modern and traditional stove design, CL5 gas stoves balance simplicity with subtle details.

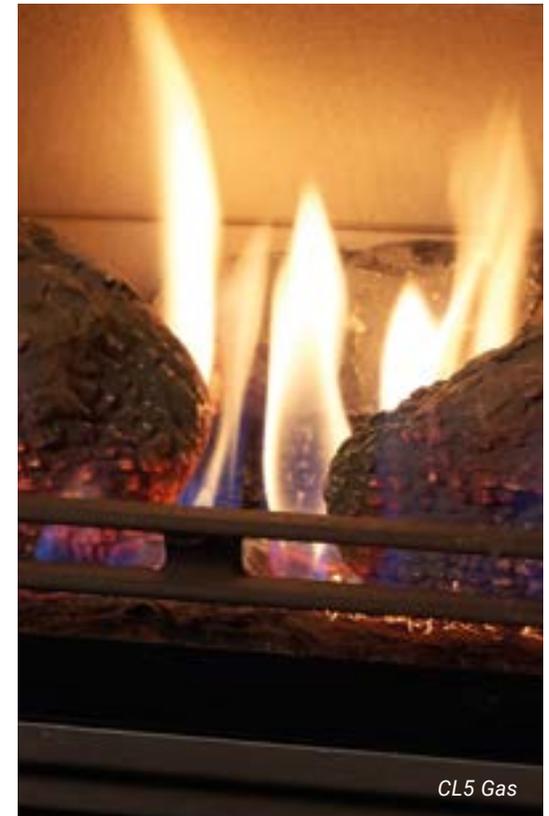

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control Options (Page 80) | | | Styling |
|-------------------|--------------------------|------------|------------------|-------------------------|----------------|---------------|----------|-------------|---------------------------|-----------------------------|---------------------------------------|--------------------|
| | HEAT OUTPUT RANGE | EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | VERMICULITE | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE | STOVE BENCH OPTION |
| Conventional Flue | 1.50 - 3.10kW | 75.0% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |
| Balanced Flue | 2.10 - 3.80kW | 95.4% | A* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote



See page 66 for electric models



SEE IT BURNING AT:
gazco.com/cl5gas



CL8 Gas

The largest model in the range, the CL8 Gas makes for an impressive centrepiece with a heat output to match. An expansive glass viewing window ensures an excellent view of the flames.



CL8 on 100 Low Bench

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining | Control Options (Page 80) | | | Styling |
|-------------------|--------------------------|------------|------------------|-------------------------|----------------|---------------|----------|-------------|---------------------------|-----------------------------|---------------------------------------|--------------------|
| | HEAT OUTPUT RANGE | EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | VERMICULITE | MANUAL | STANDARD UPGRADEABLE REMOTE | PROG. THERMOSTATIC UPGRADEABLE REMOTE | STOVE BENCH OPTION |
| Conventional Flue | 1.80 - 4.80kW | 78.0% | E | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |
| Balanced Flue | 2.70 - 5.50kW | 90.8% | B* | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |



See page 66 for electric models

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

* When using Programmable Thermostatic Remote



SEE IT BURNING AT:
gazco.com/cl8gas



SEE IT BURNING AT:
[gazco.com/clelectric](https://www.gazco.com/clelectric)



CL Electric

CL electric stoves come in three sizes each featuring our remote controlled Chromalight LED lighting systems for extraordinarily realistic visuals, with an assortment of fuel effects to choose from.



CL3 Electric with Log & Pebble fuel effect and Amber flame setting, on 45 Low Bench



CL8 Electric with Log & Pebble fuel effect and Amber flame setting

| | Heat Output | Interchangeable Fuel Beds | | Lighting Effects | | | Control | Styling |
|-----|------------------------------------|---------------------------|--------------------|----------------------------------|------------------------|------------------------------|--------------------------------------|--------------------|
| | kW HEAT OUTPUT RANGE | LOG AND PEBBLE | CRYSTAL ICE EFFECT | CHROMALIGHT IMMERSIVE LED SYSTEM | MULTIPLE FLAME EFFECTS | 13 FUEL BED LIGHTING COLOURS | PROGRAMMABLE THERMOSTATIC ECO REMOTE | STOVE BENCH OPTION |
| CL3 | 1.00 - 2.00kW or flame effect only | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 | |

For additional information, specifications and complete model choices, please see pages 82 onwards.

See page 60-65 for gas models

Liberty 85 Electric

Designed to make a statement, the Liberty 85 Electric stove combines bold design language, advanced technologies, and a range of customisable options. See overleaf for more installation choices.



Liberty 85 Electric in Black with matching Black Bench, with Log & Pebble fuel effect and Amber flame setting

| | Heat Output | Interchangeable Fuel Beds | | Lighting Effects | | | Control | Styling Options | | |
|------------|------------------------------------|---------------------------|---------------------------|-----------------------------------------|-------------------------------|-------------------------------------|---------------------------------------------|------------------------------|-----------------------------------------|---------------------------|
| | HEAT OUTPUT RANGE | LOG AND PEBBLE | CRYSTAL ICE EFFECT | CHROMALIGHT IMMERSIVE LED SYSTEM | MULTIPLE FLAME EFFECTS | 13 FUEL BED LIGHTING COLOURS | PROGRAMMABLE THERMOSTATIC ECO REMOTE | WHITE OR BLACK FINISH | PLINTH OR BENCH MOUNTING OPTIONS | STOVE BENCH OPTION |
| Liberty 85 | 1.00 - 2.00kW or flame effect only | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |

For additional information, specifications and complete model choices, please see pages 82 onwards.

For more options see overleaf

Liberty 85 Electric in White with matching White Plinth, with Log & Pebble fuel effect and Amber and Blue accent flame setting

SEE IT BURNING AT:
[gazco.com/liberty85](https://www.gazco.com/liberty85)





SEE IT BURNING AT:
gazco.com/liberty85



Liberty 85 Electric in Black with Log & Pebble fuel effect and Amber flame setting, on a 120 High Bench

Liberty 85 Electric (continued)

In addition to the matching Plinth and Bench options shown on the preceding pages, the Liberty 85 can also be installed on a number of our Stove Benches (shown on page 76) or without any mounting options at all.



Liberty 85 Electric in White with Log & Pebble fuel effect and Amber flame setting

| | Heat Output | Interchangeable Fuel Beds | | Lighting Effects | | | Control | Styling Options | | |
|------------|------------------------------------|---------------------------|---------------------------|-----------------------------------------|-------------------------------|-------------------------------------|---------------------------------------------|------------------------------|-----------------------------------------|---------------------------|
| | HEAT OUTPUT RANGE | LOG AND PEBBLE | CRYSTAL ICE EFFECT | CHROMALIGHT IMMERSIVE LED SYSTEM | MULTIPLE FLAME EFFECTS | 13 FUEL BED LIGHTING COLOURS | PROGRAMMABLE THERMOSTATIC ECO REMOTE | WHITE OR BLACK FINISH | PLINTH OR BENCH MOUNTING OPTIONS | STOVE BENCH OPTION |
| Liberty 85 | 1.00 - 2.00kW or flame effect only | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ Page 76 |

For additional information, specifications and complete model choices, please see pages 82 onwards.

See page 92 for an additional image

For more options see preceding pages

Studio 1 Freestanding Gas

A designer gas stove with a range of styling options, the Studio 1 Freestanding transforms your home to offer the very best in relaxing ambience.



| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining Options | | | Control | Mounting |
|-------------------|--------------------------------|-------------------------|------------------------------|-------------------------|----------------|---------------|----------|-----------------------|-------------|--------------|----------------------------------|----------------------------------|
| | kW HEAT OUTPUT RANGE | E% EFFICIENCY | E EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | ECHOFLAME BLACK GLASS | VERMICULITE | BLACK REEDED | PROGRAMMABLE THERMOSTATIC REMOTE | PLINTH OR BENCH MOUNTING OPTIONS |
| Conventional Flue | 2.00 - 4.60kW | 72% | E | ✓ | ✓ | ✗ | ✓ | As standard | Optional | Optional | ✓ Page 80 | ✓ |
| Balanced Flue | 3.00 - 5.30kW | 92% | A | ✗ | ✗ | ✓ | ✓ | As standard | Optional | Optional | ✓ Page 80 | ✓ |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

SEE IT BURNING AT:
gazco.com/studio1freestandinggas



Studio 1 Freestanding conventional flue with matching Black Bench and EchoFlame Black Glass lining



SEE IT BURNING AT:
gazco.com/studio2freestandinggas



Studio 2 Freestanding balanced flue with matching
Black Bench and Black Reeded lining

Studio 2 Freestanding Gas

The landscape Studio 2 Freestanding offers an expansive view of the realistic flames and can be customised with different firebox linings, as well as a choice of either plinth or bench mounting options.



Studio 2 Freestanding conventional flue with matching Black Plinth and EchoFlame Black Glass lining

| | Heat Output & Efficiency | | | Chimney or Flue Options | | | Fuel Bed | Lining Options | | | Control | Mounting |
|-------------------|--------------------------------|-------------------------|-------------------------|-------------------------|-----------------------|----------------------|-------------|------------------------------|--------------------|---------------------|-----------------------------------------|-----------------------------------------|
| | kW HEAT OUTPUT RANGE | E% EFFICIENCY | EFFICIENCY CLASS | BRICK CHIMNEY | PRE-FABRICATED | BALANCED FLUE | LOGS | ECHOFLAME BLACK GLASS | VERMICULITE | BLACK REEDED | PROGRAMMABLE THERMOSTATIC REMOTE | PLINTH OR BENCH MOUNTING OPTIONS |
| Conventional Flue | 2.70 - 6.30kW | 81% | C | ✓ | ✓ | ✗ | ✓ | As standard | Optional | Optional | ✓ | ✓ |
| Balanced Flue | 3.20 - 7.00kW | 92% | A | ✗ | ✗ | ✓ | ✓ | As standard | Optional | Optional | ✓ | ✓ |

Efficiency figures given are based upon the maximum heat output achieved for these models. For additional information, specifications and complete model choices, please see pages 82 onwards.

Stove Benches

These versatile steel benches are compatible with the Loft, Vision, Vogue and Liberty 85 stoves. With a variety of sizes they offer greater design possibilities such as central or offset stove positioning, expanding your styling options.



| Product Code | Bench | W (mm) | H (mm) | D (mm) |
|------------------------------------------|-----------------------------|--------|--------|--------|
| RVACLB45BHT* | 45 Low bench | 450 | 250 | 420 |
| RVACB45BHT* | 45 High bench | 450 | 350 | 420 |
| RVACLB100BHT* | 100 Low bench | 1000 | 250 | 420 |
| RVACB100BHT* | 100 High bench | 1000 | 350 | 420 |
| RVACLB120BHT | 120 Low bench | 1200 | 250 | 420 |
| RVACB120BHT | 120 High bench | 1200 | 350 | 420 |
| RVACLB140BHT | 140 Low bench | 1400 | 250 | 420 |
| RVACB140BHT | 140 High bench | 1400 | 350 | 420 |
| RVACLB180BHT | 180 Low bench | 1800 | 250 | 465 |
| RVACB180BHT | 180 High bench | 1800 | 350 | 465 |
| Deeper Bench Options (500mm Deep) | | | | |
| RVACLB120BHT | 120 Low bench (500mm deep) | 1200 | 250 | 500 |
| RVACB120BHT | 120 High bench (500mm deep) | 1200 | 350 | 500 |
| RVACLB140BHT | 140 Low bench (500mm deep) | 1400 | 250 | 500 |
| RVACB140BHT | 140 High bench(500mm deep) | 1400 | 350 | 500 |
| RVACLB180BHT | 180 Low bench (500mm deep) | 1800 | 250 | 500 |
| RVACB180BHT | 180 High bench (500mm deep) | 1800 | 350 | 500 |

*Not compatible with Liberty 85 Electric Stoves



Gas Vogue Midi T on 100 Low Bench



Gas Vision Midi on 45 Low Bench




Liberty 85 Electric in White with Log & Pebble fuel effect and Amber flame setting, on a 120 Low Deep Bench

Balanced Flue Gas Stove Systems

The Gazco Balanced Flue system means no chimney is not a problem if you opt for a balanced flue gas stove, as it draws combustion air from outside through its concentric pipe systems. A full range of optional flue components is available to suit configurations shown on page 78.

Gazco have specifically developed a range of flue system components to complement your balanced flue stove. Crafted from 304 grade stainless steel and aluminium with some items additionally offered in anthracite and matt ivory paint finishes. Designed with ease of installation and flexibility in mind, these flue systems simply push together without the requirement for locking bands or screws. Both the inner and outer pipes are secured with easy fit, self locking, high temperature silicone seals. For further information, please speak to your retailer or visit www.gazco.com.

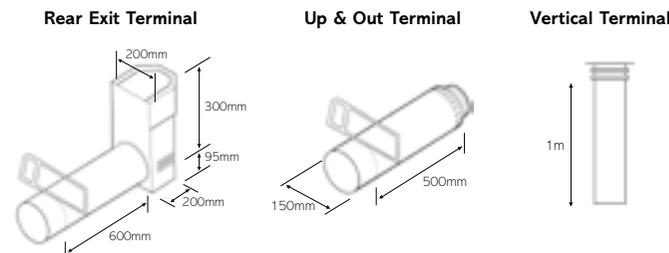

Components for Balanced Flue Models

| Basic Stainless Steel Kits | Product Code |
|--------------------------------------------------------------------------------------------------------------|------------------|
| Rear exit, horizontal - complete with terminal guard | 8526 |
| Top exit, up & out for Chesterfield 5, Sheraton 5, Huntingdon 30, Stockton 5, Loft, Vision Midi & all Vogues | 8523 |
| Top exit, up & out for Vision Medium | 8509 |
| Top exit, vertical for all Loft & Vogue Midi T | 8524 |
| Top exit vertical for Chesterfield 5, Sheraton 5, Huntingdon 30/40, Stockton 5, Vision & Vogue Midi | 999-539 |
| 45° offset bend (set of two) for use with 8524 | 8530 |
| Basic Anthracite Steel Kits* | |
| Top exit, up & out for Chesterfield 5, Sheraton 5, Huntingdon 30, Stockton 5, Loft, Vision Midi & all Vogues | 8523AN |
| Top exit, up & out for Vision Medium | 8509AN |
| Top exit, vertical for all Loft & Vogue Midi T | 8524AN |
| Top exit vertical for Chesterfield 5, Sheraton 5, Huntingdon 30/40, Stockton 5, Vision & Vogue Midi | 999-539AN |
| 45° offset bend (set of two) for use with 8524AN | 8530AN |
| Basic Matt Ivory Steel Kits* | |
| Top exit, up & out for Huntingdon 30 | 999-111 |
| Top exit vertical for Huntingdon 30/40 | 999-224 |
| Additional Anthracite Steel components for top exit (as required) | |
| 200mm straight (effective length 140mm) | 8527AN |
| 500mm straight (effective length 440mm) | 8528AN |
| 1000mm straight (effective length 940mm) | 8529AN |
| 15° bend | 999-031 |
| 30° bend | 999-078 |
| 45° bend | 8507AN |
| 90° bend | 8508AN |

| Additional Stainless Steel components for top exit (as required) | Product Code |
|------------------------------------------------------------------|----------------|
| 200mm straight (effective length 140mm) | 8527 |
| 500mm straight (effective length 440mm) | 8528 |
| 1000mm straight (effective length 940mm) | 8529 |
| 364-554mm adjustable straight | 999-062 |
| 15° bend | 999-003 |
| 30° bend | 999-016 |
| 45° bend | 8507 |
| 90° bend | 8508 |
| Horizontal flue terminal (wall) | 999-105 |
| Vertical flue terminal (roof) | 999-141 |
| Fixed wall support | 999-072 |
| Adjustable wall support | 999-130 |
| External wall finishing plate | 999-235 |

| Additional Matt Ivory Steel components for top exit (as required) | Product Code |
|-------------------------------------------------------------------|----------------|
| 200mm straight (effective length 140mm) | 999-357 |
| 500mm straight (effective length 440mm) | 999-372 |
| 1000mm straight (effective length 940mm) | 999-391 |
| 15° bend | 999-051 |
| 30° bend | 999-067 |
| 45° bend | 999-172 |
| 90° bend | 999-284 |

| Terminal Guards | Product Code |
|-----------------|----------------|
| Rear exit | 999-159 |
| Horizontal exit | 999-201 |

*Note: Terminal lengths are stainless steel.

Please note the Small Balanced Flue models of Marlborough2, Stockton2, Huntingdon 20 and Vision Small are rear flue exit only.

The above information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions from the Gazco website at www.gazco.com.

| Aquaseal Flashings | Product Code |
|----------------------------------------------------------------------|------------------|
| 125-175mm Aluminium Base EPDM Black to 115°C | FXQ-052 |
| 150-300mm Aluminium Base EPDM Black to 115°C | FXQ-053 |
| 150-200mm Lead Base EPDM Black to 115°C | FXQ-054 |
| 150-250mm Sq Section EPDM Black to 115°C | FXQ-058 |
| 150-250mm Sq Section/Metal EPDM Black to 115°C | FXQ-059 |
| EPDM Flashing Fixing Kit | FXQ-059SK |
| Lead Flashings | |
| Flat Lead Flashing | 999-154 |
| 30-40 Degree Lead Flashing | 999-161 |
| 40-50 Degree Lead Flashing | 999-174 |
| 45-50 Degree Lead Flashing | 999-182 |
| 45-50 Degree Ridge Flashing | 999-193 |
| Additional Components | |
| Roof Support Balanced Flue | 999-032 |
| Fire Stop Balanced Flue | 999-040 |
| Storm Collar Balanced Flue | 999-046R |
| Rear Heat Shield Plate Kit to be used with 8526 , if required | 999-220 |
| Additional Cast Iron Components for Top Exit | |
| Flue collar (BF), Matt Black | 8548 |
| Flue collar (BF), Matt Black - Huntingdon 30 & 40 only | 999-347 |

Your Home and Flue Requirements

When selecting your stove, your local Gazco retailer will need to make sure it's suitable for your home. Firstly, you need to know what fuel type you will be using. Secondly, you will need to be aware of what type of chimney or flue you have. If you do not have a chimney then don't worry, Gazco have models developed to suit your home too!

Conventional Flue - Gas

Conventional flue systems are easily recognisable as either a conventional brick or stone chimney or pre-fabricated chimney system. Should your home have none of these at present, it is usually possible to have a pre-fabricated system installed if required.



Brick or Stone Chimney
(Class 1)

The chimney stack rises well above the roofline and is topped by a traditional chimney pot or gas terminal. This type of chimney relies on the natural circulation of heated air to expel the products of combustion up your chimney.




Pre-Fabricated Flues
(Class 1 & 2)

You will see a metal flue cowl on your roof. Some are all metal whilst others may terminate through a short rectangular pot (but without a chimney stack). These flues create the same circulation of heated air as a brick or stone chimney.

Rigid or Flexible Metal Flue Systems

With this flue system rigid metal tubes, or a combination of rigid and flexible metal tubes, extend vertically directly from the stove to the outside of the property. This may be either straight through the ceiling or roof with the flue pipe exposed, or by using the channel of a chimney or a studwork enclosure. The products of combustion are carried up the flue by natural convection.

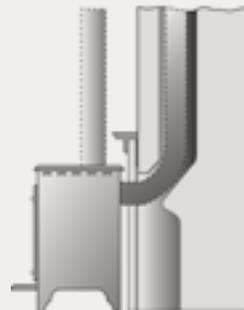


Optional Linerless Flue Kit

A selection of Gazco conventional flue gas stoves are compatible with our optional linerless flue kit. At just 0.5 metres long, this short piece of flexible, stainless steel flue pipe and debris deflector has been specifically designed to be slotted into your masonry chimney. This eliminates the need for the chimney to be fully lined and any associated labour, facilitating a simpler and more cost effective solution.

The Optional Linerless Flue Kit is compatible with:

- Chesterfield 5 Gas
- Sheraton 5 Gas
- Vogue Midi Gas Range
- Vogue Midi T Gas Range
- Loft Range

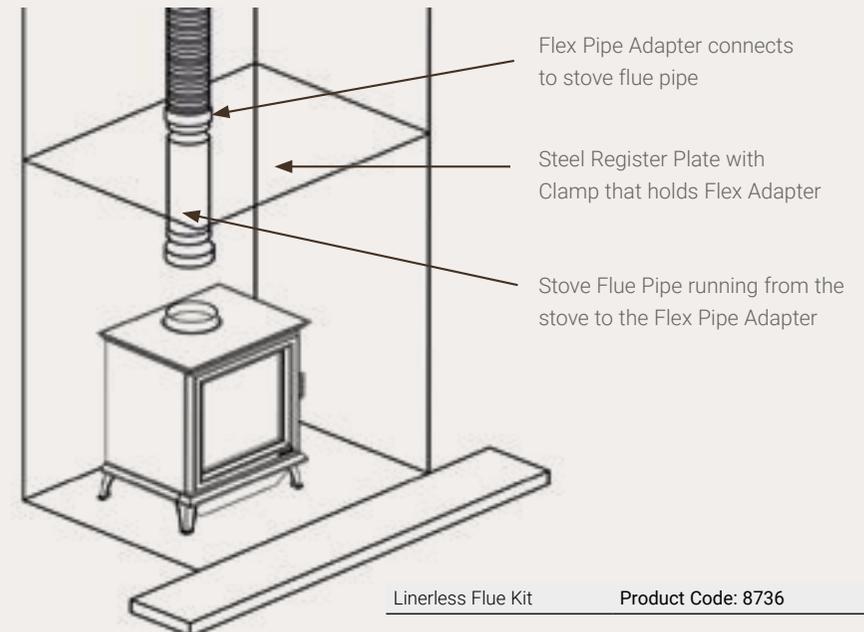

Balanced Flue - Gas

Balanced flues models are completely sealed from the room into which they are installed (so there are no draughts and heating efficiency is increased) and a twin-wall pipe vents directly to an outside wall.




Balanced Flue
(No chimney required)

Air for combustion is drawn in through the outer pipe whilst the inner pipe removes the combustion gases to the exterior of the property. Depending on the stove selected, the twin-walled pipe may exit horizontally through an external wall or vertically through the roof. Gazco offers a comprehensive range of balanced flue system components.



Balanced Flue System Options

- A** - Rear outlet (max 600mm wall thickness).
- B** - Top outlet/up and out (min rise 500mm, max 3m), horizontal (min 250mm, max 5m). An additional bend can be incorporated in to the horizontal section of the 'up and out', dependent upon a 1m min vertical rise.
- C** - Top outlet/vertical (min 3m, max 10m). Vogue Midi T / Vogue Midi T Midline (Min 2m, Max 10m)
- D** - Top outlet/vertical with offset (min to first bend 500mm, max flue length 10m).

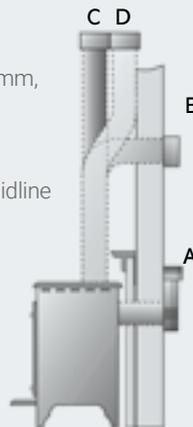

Ask your retailer for full technical details or see our Balanced Flue System brochure at www.gazco.com.

Electric Stoves

(No chimney required)

Our range of electric stoves incorporates our Chromalight Immersive LED technology and do not have any chimney or flue requirements. From the contemporary collection of Vision to the more traditional Sheraton models, these electric fires can be enjoyed with or without the heat and operated using a remote control, so you can enjoy the warmth and ambience from the comfort of your favourite chair!



No Air Vent Required (UK)

All stoves shown with this symbol, boast the advantage of not normally requiring an air vent* where the air permeability is greater than 5.0m³/hr/m². Please discuss this in full with your local Gazco retailer.



**Requirements in the Republic of Ireland are different.*

Loft with Woodgrain
Sandstone Log Store



Remote Controls

Gas Stoves

Gazco was the first UK company to introduce remote controls for gas fires. Today, our remote control systems for our gas stoves feature advanced technologies and offer the ultimate in convenience.

Standard upgradeable remote control



Once the pilot light has been ignited manually you can vary the flame height and heat output from the comfort of your armchair.

(Upgradeable option for Marlborough2, Stockton, Huntingdon, Vogue and Vision gas stoves)

Programmable Thermostatic upgradeable remote control



This deluxe version has two additional features. The first allows you to thermostatically control the room temperature whilst the second allows you to programme your stove to switch itself on and off twice a day.

(Upgradeable option for Marlborough2, Stockton, Huntingdon, Vogue and Vision gas stoves)

Programmable Thermostatic remote control *(Supplied with Loft & Studio Freestanding)*



This advanced remote is loaded with exciting features that make it possible to programme your stove to perfectly complement your lifestyle. Not only can you ignite, extinguish and thermostatically control your stove, this remote control system benefits from advanced technology that gives you the option to create an automatic, intelligent heating program that means your home is comfortable and cosy at any time of the day or night.

Fully-sequential thermostatic remote control *(Supplied with Gas Chesterfield 5 and Sheraton 5)*



Gazco's fully-sequential thermostatic control system allows you to ignite your stove in seconds as well as adjust flame height from the comfort of your sofa. You can also set your stove to be controlled thermostatically to maintain your preferred room temperature.

Electric Stoves

Our range of Electric Stoves are as easy to install as plugging in and switching on! They are available in a range of designs from traditional to modern, to suit all homes and tastes.

The Gazco Programmable Thermostatic Eco Handset



All Gazco Electric stoves features Gazco's Eco remote control, which provides complete control over the stove's Chromalight flame colours and lighting effects, as well as heating and energy saving features. Ambient heating control allows you to set the optimum temperature for your room between 15°C and 25°C, with the stove automatically managing heating power to reach the chosen temperature as efficiently as possible. Daily and weekly heating lets you program your stove to suit your lifestyle and can be easily advanced or delayed without disrupting scheduling.

Energy saving features such as Open Window Detection save energy by turning off the heat if a sudden drop in room temperature of 4°C or more is detected, for example when a door or window is opened. Heating can be easily resumed by pressing the heat button again or closing the window.



Vogue Midi Electric with Crystal-Ice fuel effect on Blue flame setting

Additional Information

Product Improvement & Brochure Photography

Gazco pursue a policy of continuous product improvement, therefore, whilst our products are correct at the time of the photography, we reserve the right to make alterations and amendments. Exact product details should be discussed with your retailer at the time of purchase.

All fire and flame photography has been taken from genuine products; however, the exact appearance of the flame picture for any appliance will vary depending on the nature of the flue type, installation surroundings, local geographical features and the way in which the appliance is operated. Owing to variations in studio lighting and printing inks, the colours of stoves illustrated in this brochure may differ slightly from actual models.

Given that building regulations are subject to constant change, some of the photography in this brochure may not comply with the requirements of the latest Building Regulations and you should always check your proposed installation arrangement with your qualified gas installer before proceeding. Certain settings in this brochure are dependent on the use of heat shields to reduce the required separation from combustible material.

Please note: The operation and appearance of gas appliances depends on variable factors such as the gas pressure supplied.

Installation and Safety

Gazco gas stoves must be fitted by a qualified gas installer (Gas Safe registered in the United Kingdom or Bord Gais registered in the Republic of Ireland) who should also verify the proposed site conditions are fully suitable for the product selected. Complete installation instructions for many models can be obtained prior to purchase by downloading them from www.gazco.com.

Please note that all parts of these stoves become extremely hot during operation and can result in serious injury and burns if touched. It is therefore recommended that a fireguard complying with BS 8423:2002 is used in the presence of young children, the elderly or infirm.

Technical Specifications

All specifications given in the main part of this brochure are approximate. Actual specifications for each individual product will vary according to the exact model and are given on pages 84 - 96. Your Gazco retailer will be pleased to help explain specific model specifications and provide any further information you may require, or you can view/download specification sheets from www.gazco.com.

Servicing and Support

To keep your gas stove looking and performing at it's best, it must be serviced annually. This service must be undertaken



by a GasSafe (Great Britain), CORGI (Northern Ireland) or Bord Gáis (Republic of Ireland) approved engineer and your retailer can organise this for you. Alternatively, Gazco offer a manufacturer's premium service with our friendly team of qualified engineers which can be booked at www.gazco.com/support.

Warranty information

Your Gazco Expert Retailer will provide you with a Two Year Warranty for your new gas or electric stove. The warranty for gas stoves can be extended to a period of Five years by registering your stove with Gazco. Please note, these warranties exclude certain consumable parts.



Stoves purchased outside of Gazco's Expert Retailer Network will carry a standard One Year non-extendable Warranty or the minimum statutory warranty for your country. Full warranty terms and conditions are available to view at www.gazco.com.

WIN

 the cost of your product back!

For further home inspiration you can **view real life installations** at our Customer Showcase page and **share your thoughts and photos of your new stove or fire installation to enter our draw!**

- We will publish your entry on our Customer Showcase
- You will be entered into a draw for the chance to win the cost of your product back
- **Gain a second entry** by registering your product online for your free extended warranty at gazco.com/registration



View real life installations and submit your review at gazco.com/customershowcase


* Terms and conditions apply. See online for details

Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Chesterfield 5 Gas and Electric

Dimensions (mm)

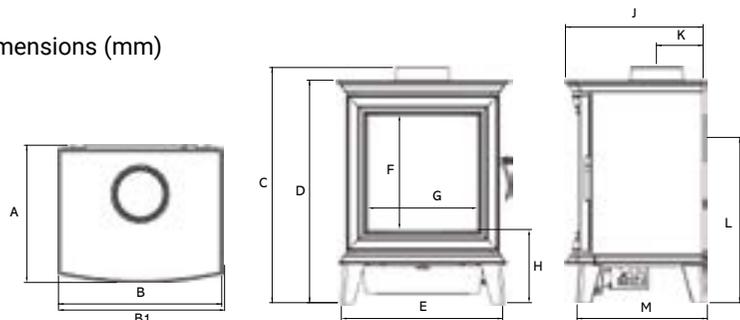

| | A | B | B1 | C | D | E | F | G | H | J | K | L | M | Weight |
|--------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--------|
| Chesterfield 5 Gas (CF) | 392 | 472 | 477 | 650 | 614 | 450 | 316 | 304 | 201 | 383 | 130 | 456 | 358 | 62kg |
| Chesterfield 5 Gas (BF) | 392 | 472 | 477 | 672 | 614 | 450 | 316 | 304 | 201 | 383 | 146 | 447 | 358 | 63kg |
| Chesterfield 5 Electric | 391 | 472 | 477 | - | 614 | 450 | 316 | 304 | 201 | 383 | - | - | 358 | 56kg |

Recommended clearances between gas stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

| Product Code | Colour | Flue Type | Fuel Type | Heat Input | Heat Output | Efficiency | Energy Efficiency Class |
|--------------|------------|--------------|-----------|------------|-------------|------------|-------------------------|
| ⊗ 505-003 | Matt Black | Conventional | Nat.Gas | 5.80kW | 4.00kW | 76% | D |
| ⊗ 505-402 | Matt Black | Conventional | LPG | 5.40kW | 3.80kW | 76% | D |
| ⊗ 505-051 | Matt Black | Balanced | Nat.Gas | 4.70kW | 3.80kW | 90.6% | B |
| ⊗ 505-633 | Matt Black | Balanced | LPG | 4.80kW | 4.00kW | 90.6% | B |
| ⊗ 605-850 | Matt Black | - | Electric | - | 1.50kW | - | - |

Options for Gas Chesterfield 5

Product Code

Linerless Flue Kit

8736


Stove Flue Pipe

| | |
|------------------------------------------|-------------|
| 1' Straight pipe | 4500 |
| 2' Straight pipe | 4501 |
| 3' Straight pipe | 4502 |
| 90° long 'elbow' adaptor (9" projection) | 4514 |

Stove Flue Pipe Balanced flue versions of the Gas Chesterfield 5 must only use the 6" stainless steel flue provided. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version Chesterfield 5 stove.

Sheraton 5 Gas and Electric

Dimensions (mm)

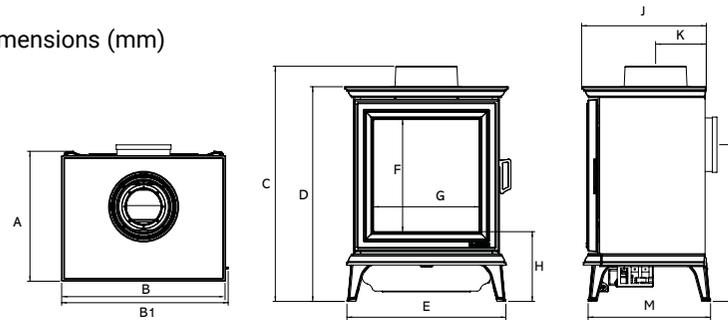

| | A | B | B1 | C | D | E | F | G | H | J | K | L | M | Weight |
|----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--------|
| Sheraton 5 Gas (CF) | 371 | 472 | 479 | 651 | 615 | 458 | 320 | 304 | 200 | 359 | 130 | 457 | 353 | 61kg |
| Sheraton 5 Gas (BF) | 371 | 472 | 479 | 673 | 615 | 458 | 320 | 304 | 200 | 359 | 146 | 449 | 353 | 62kg |
| Sheraton 5 Electric | 371 | 472 | 479 | - | 615 | 458 | 320 | 304 | 200 | 359 | - | - | 358 | 55kg |

Recommended clearances between gas stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

| Product Code | Colour | Flue Type | Fuel Type | Heat Input | Heat Output | Efficiency | Energy Efficiency Class |
|--------------|------------|--------------|-----------|------------|-------------|------------|-------------------------|
| ⊗ 505-014 | Matt Black | Conventional | Nat.Gas | 5.80kW | 4.00kW | 76% | D |
| ⊗ 505-428 | Matt Black | Conventional | LPG | 5.40kW | 3.80kW | 76% | D |
| ⊗ 505-215 | Matt Black | Balanced | Nat.Gas | 4.70kW | 3.80kW | 90.6% | B |
| ⊗ 505-537 | Matt Black | Balanced | LPG | 4.80kW | 4.00kW | 90.6% | B |
| ⊗ 605-832 | Matt Black | - | Electric | - | 1.50kW | - | - |

Options for Gas Sheraton 5

Product Code

Linerless Flue Kit

8736

Stove Flue Pipe


| | |
|------------------------------------------|-------------|
| 1' Straight pipe | 4500 |
| 2' Straight pipe | 4501 |
| 3' Straight pipe | 4502 |
| 90° long 'elbow' adaptor (9" projection) | 4514 |

Stove Flue Pipe Balanced flue versions of the Gas Sheraton 5 must only use the 6" stainless steel flue provided. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version Sheraton 5 stove.

Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Marlborough2 Gas and Electric

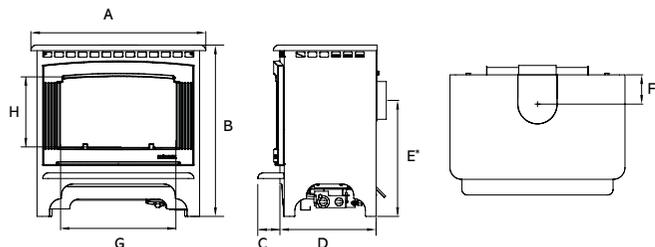

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

* Small balanced flue models are rear flue exit only

Dimensions (mm)

| | A | B | C | D | E | F | G | H | Weight |
|------------------------------|-----|-----|----|-----|-----|-----|-----|-----|--------|
| Small Marlborough2 Gas (CF) | 429 | 533 | 75 | 280 | 349 | 110 | 232 | 211 | 35kg |
| Medium Marlborough2 Gas (CF) | 600 | 583 | 76 | 330 | 395 | 103 | 232 | 211 | 57kg |
| Small Marlborough2 Gas (BF)* | 429 | 533 | 75 | 280 | 369 | 110 | 398 | 241 | 36kg |
| Medium Marlborough2 Gas (BF) | 600 | 583 | 76 | 330 | 445 | 129 | 398 | 241 | 67kg |
| Small Marlborough2 Electric | 429 | 558 | 75 | 280 | - | - | 232 | 211 | 33kg |
| Medium Marlborough2 Electric | 600 | 583 | 76 | 330 | - | - | 398 | 241 | 50kg |

| Product Code | Model | Colour | Flue Type | Fuel Type | Heat Input | Heat Output | Efficiency | Energy Efficiency Class |
|--------------|--------|------------|--------------|-----------|------------|-------------|------------|-------------------------|
| ⊗ 559-009 | Small | Matt Black | Conventional | Nat.Gas | 3.30kW | 2.30kW | 76% | E |
| ⊗ 559-448 | Small | Matt Black | Conventional | LPG | 3.20kW | 2.20kW | 76% | E |
| ⊗ 559-024 | Small | Matt Black | Balanced | Nat.Gas | 3.20kW | 2.50kW | 85.1% | C# |
| ⊗ 559-462 | Small | Matt Black | Balanced | LPG | 3.10kW | 2.40kW | 85.1% | C# |
| ⊗ 559-018 | Medium | Matt Black | Conventional | Nat Gas | 6.60kW | 4.60kW | 78% | E |
| ⊗ 559-456 | Medium | Matt Black | Conventional | LPG | 6.70kW | 4.80kW | 78% | E |
| ⊗ 559-033 | Medium | Matt Black | Balanced | Nat Gas | 6.60kW | 5.40kW | 90.8% | B# |
| ⊗ 559-471 | Medium | Matt Black | Balanced | LPG | 6.60kW | 5.50kW | 90.8% | B# |
| ⊗ 659-085 | Small | Matt Black | - | Electric | - | 2.00kW | - | - |
| ⊗ 659-112 | Medium | Matt Black | - | Electric | - | 2.00kW | - | - |

Gas Remote Control Options

| | Product Code |
|------------------------------------------------------|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |

When upgraded with a Programmable Thermostatic Control (8456)

Stove Flue Pipe & Flue Collars

| | |
|------------------------------------------|------|
| 1' Straight pipe | 4500 |
| 2' Straight pipe | 4501 |
| 3' Straight pipe | 4502 |
| 90° long 'elbow' adaptor (9" projection) | 4514 |
| Optional Top Exit Flue Collar (CF) | 8549 |
| Optional Top Exit Flue Collar (BF) | 8548 |

Stove Flue Pipe Balanced flue versions of the Gas Marlborough2 must only use the 6" stainless steel flue provided. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version Marlborough2 stove.




Marlborough2 Small Electric with Log & Pebble fuel effect and Amber flame setting

Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Stockton2 & Stockton 5 Gas and Electric

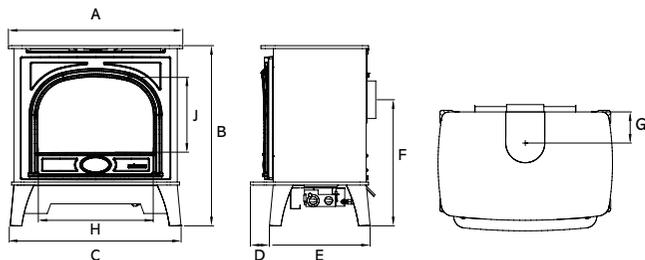

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

*Small balanced flue stoves are rear exit only.

Dimensions (mm)

| | A | B | C | D | E | F | G | H | J | Weight |
|---------------------------|-----|-----|-----|----|-----|-----|-----|-----|-----|--------|
| Small Stockton2 Gas (CF) | 438 | 525 | 418 | 50 | 290 | 348 | 111 | 232 | 220 | 52kg |
| Stockton 5 Gas (CF) | 481 | 544 | - | 64 | 273 | 380 | 92 | 267 | 212 | 55kg |
| Medium Stockton2 Gas (CF) | 601 | 617 | 589 | 65 | 347 | 432 | 107 | 398 | 258 | 78.5kg |
| Small Stockton2 Gas (BF)* | 438 | 525 | 418 | 50 | 290 | 368 | 111 | 232 | 220 | 53kg |
| Stockton 5 Gas (BF) | 481 | 544 | - | 64 | 273 | 401 | 139 | 267 | 212 | 55kg |
| Medium Stockton2 Gas (BF) | 601 | 617 | 589 | 65 | 347 | 482 | 136 | 398 | 258 | 87kg |
| Small Stockton2 Electric | 438 | 525 | 418 | 50 | 290 | - | - | 232 | 220 | 50kg |
| Stockton 5 Electric | 481 | 544 | - | 64 | 273 | - | - | - | - | 55kg |
| Medium Stockton2 Electric | 601 | 617 | 589 | 65 | 347 | - | 139 | 398 | 258 | 72kg |

| Product Code | Model | Colour | Flue Type | Fuel Effect | Fuel Type | Heat Input | Heat Output | Efficiency | Energy Efficiency Class |
|--------------|--------|------------|--------------|-------------|-----------|------------|-------------|------------|-------------------------|
| ⊗ 504-053 | Small | Matt Black | Conventional | Logs | Nat Gas | 3.30kW | 2.30kW | 76% | E |
| ⊗ 504-513 | Small | Matt Black | Conventional | Logs | LPG | 3.20kW | 2.20kW | 76% | E |
| ⊗ 504-078 | Small | Matt Black | Balanced | Logs | Nat Gas | 3.20kW | 2.50kW | 85.1% | C# |
| ⊗ 504-536 | Small | Matt Black | Balanced | Logs | LPG | 3.10kW | 2.40kW | 85.1% | C# |
| ⊗ 8575MCUC | 5 | Matt Black | Conventional | Coal | Nat Gas | 4.60kW | 3.00kW | 73% | E |
| ⊗ P8575MCUC | 5 | Matt Black | Conventional | Coal | LPG | 4.40kW | 3.00kW | 73% | E |
| ⊗ 8563LUC | 5 | Matt Black | Balanced | Logs | Nat Gas | 4.25kW | 3.50kW | 91.8% | B# |
| ⊗ P8563LUC | 5 | Matt Black | Balanced | Logs | LPG | 4.10kW | 3.50kW | 84.5% | B# |
| ⊗ 504-066 | Medium | Matt Black | Conventional | Logs | Nat Gas | 6.60kW | 4.60kW | 78% | E |
| ⊗ 504-522 | Medium | Matt Black | Conventional | Logs | LPG | 6.70kW | 4.80kW | 78% | E |
| ⊗ 504-085 | Medium | Matt Black | Balanced | Logs | Nat Gas | 6.60kW | 5.40kW | 90.8% | B* |
| ⊗ 504-547 | Medium | Matt Black | Balanced | Logs | LPG | 6.60kW | 5.50kW | 90.8% | B# |
| ⊗ 604-144 | Small | Matt Black | - | Various | Electric | - | 2.00kW | - | - |
| ⊗ 604-172 | 5 | Matt Black | - | Various | Electric | - | 2.00kW | - | - |
| ⊗ 604-203 | Medium | Matt Black | - | Various | Electric | - | 2.00kW | - | - |

When upgraded with a Programmable Thermostatic Control (8456)



Gas Stockton 5 balanced flue with log-effect fire

Gas Remote Control Options

| | Product Code |
|------------------------------------------------------|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |

Stove Flue Pipe


| | |
|------------------------------------------|------|
| 1' Straight pipe | 4500 |
| 2' Straight pipe | 4501 |
| 3' Straight pipe | 4502 |
| 90° long 'elbow' adaptor (9" projection) | 4514 |
| Optional Top Exit Flue Collar (CF) | 8549 |
| Optional Top Exit Flue Collar (BF) | 8548 |

Stove Flue Pipe Balanced flue versions of the Gas Stockton must only use the 6" stainless steel flue provided. Gazco recommends the use of 5" Matt Black enamelled stove pipe with the conventional flue version.

Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Huntingdon 20 Gas and Electric

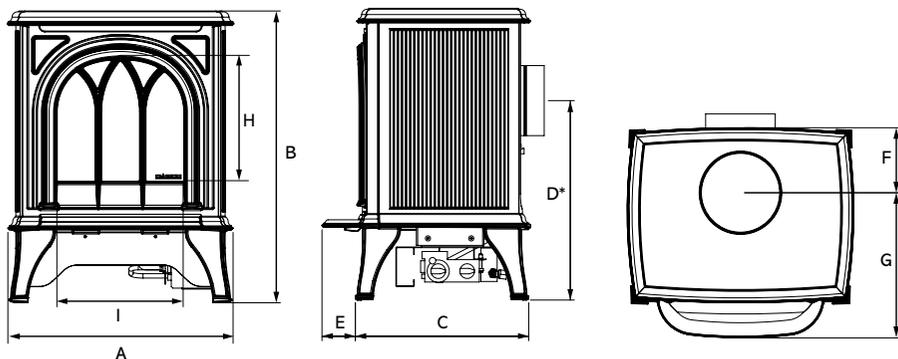

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

*Huntingdon 20 Balanced Flue is Rear Exit only.

Dimensions (mm)

| | A | B | C | D | E | F | G | H | I | Weight |
|-------------------------|-----|-----|-----|-----|----|-----|-----|-----|-----|--------|
| Huntingdon 20 Gas (CF) | 416 | 535 | 320 | 366 | 62 | 119 | 266 | 223 | 234 | 45kg |
| Huntingdon 20 Gas (BF)* | 416 | 535 | 320 | 386 | 62 | 160 | 225 | 223 | 234 | 45kg |
| Huntingdon 20 Electric | 413 | 536 | 324 | - | 62 | - | - | 223 | 234 | 35kg |

Remote Controls

Product Code

Standard Upgradeable Remote Control

8455

Programmable Thermostatic Upgradeable Remote Control

8456

Stove Flue Pipe and Collars

1' Straight pipe, Matt Black

4500

2' Straight pipe, Matt Black

4501

3' Straight pipe, Matt Black

4502

90° long 'elbow' adaptor (9" projection), Matt Black

4514

Matt Black Flue collar, Conventional Flue, Huntingdon

999-010

Stove Flue Pipe Balanced flue versions of the Gas Huntingdon 20 must only use the 6" stainless steel flue provided. For additional Matt Black flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" Matt Black enamelled stove pipe with the conventional flue version.

Gas & Electric Huntingdon 20 Tracery Door

| Product Code | Colour | Door Style | Flue Type | Fuel Type | Heat Input | Heat Output | Efficiency | Energy Efficiency Class |
|--------------|------------|------------|--------------|-----------|------------|-------------|------------|-------------------------|
| ⊗ 515-035 | Matt Black | Tracery | Conventional | Nat Gas | 3.30kW | 2.30kW | 76% | E |
| ⊗ 515-405 | Matt Black | Tracery | Conventional | LPG | 3.20kW | 2.20kW | 76% | E |
| ⊗ 515-098 | Matt Black | Tracery | Balanced | Nat Gas | 3.20kW | 2.50kW | 85.1% | C# |
| ⊗ 515-502 | Matt Black | Tracery | Balanced | LPG | 3.10kW | 2.40kW | 85.1% | C# |
| ⊗ 615-258 | Matt Black | Tracery | - | Electric | - | 2.00kW | - | - |

Gas & Electric Huntingdon 20 Clear Door

| | | | | | | | | |
|-----------|------------|-------|--------------|----------|--------|--------|-------|----|
| ⊗ 515-071 | Matt Black | Clear | Conventional | Nat Gas | 3.30kW | 2.30kW | 76% | E |
| ⊗ 515-441 | Matt Black | Clear | Conventional | LPG | 3.20kW | 2.20kW | 76% | E |
| ⊗ 515-125 | Matt Black | Clear | Balanced | Nat Gas | 3.20kW | 2.50kW | 85.1% | C# |
| ⊗ 515-529 | Matt Black | Clear | Balanced | LPG | 3.10kW | 2.40kW | 85.1% | C# |
| ⊗ 615-011 | Matt Black | Clear | - | Electric | - | 2.00kW | - | - |

When upgraded with a Programmable Thermostatic Control (8456)




Huntingdon 20 Gas Clear Door in Matt Black

Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Huntingdon 30 Gas and Electric

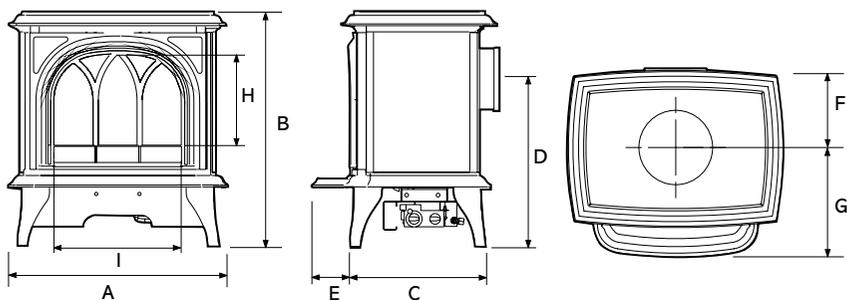

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

The Huntingdon 30 has a choice of top or rear flue exit

Dimensions (mm)

| | A | B | C | D | E | F | G | H | I | Weight |
|------------------------|-----|-----|-----|-----|----|-----|-----|-----|-----|--------|
| Huntingdon 30 Gas (CF) | 560 | 592 | 351 | 403 | 96 | 174 | 304 | 230 | 323 | 72kg |
| Huntingdon 30 Gas (BF) | 560 | 592 | 351 | 422 | 96 | 195 | 278 | 230 | 323 | 72kg |
| Huntingdon 30 Electric | 560 | 592 | 351 | - | 99 | - | - | 230 | 323 | 52kg |

Remote Controls

| | Product Code |
|------------------------------------------------------|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |

Stove Flue Pipe and Collars

| | Product Code |
|-------------------------------------------------------|--------------|
| 1' Straight pipe, Matt Black | 4500 |
| 2' Straight pipe, Matt Black | 4501 |
| 3' Straight pipe, Matt Black | 4502 |
| 90° long 'elbow' adaptor (9" projection), Matt Black | 4514 |
| Matt Black Flue collar, Conventional Flue, Huntingdon | 999-010 |
| Matt Black Flue collar, Balanced Flue, Huntingdon | 999-347 |

Stove Flue Pipe Balanced flue versions of the Gas Huntingdon 30 must only use the 6" stainless steel flue provided. For additional Matt Black flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" Matt Black enamelled stove pipe with the conventional flue version.

Gas & Electric Huntingdon 30 Tracery Door

| Product Code | Colour | Door Style | Flue Type | Fuel Type | Heat Input | Heat Output | Efficiency | Energy Efficiency Class |
|--------------|------------|------------|--------------|-----------|------------|-------------|------------|-------------------------|
| 515-004 | Matt Black | Tracery | Conventional | Nat Gas | 4.55kW | 3.10kW | 75% | E |
| 515-413 | Matt Black | Tracery | Conventional | LPG | 4.35kW | 3.00kW | 75% | E |
| 515-257 | Matt Black | Tracery | Balanced | Nat Gas | 4.30kW | 3.70kW | 95.4% | A [#] |
| 515-561 | Matt Black | Tracery | Balanced | LPG | 4.30kW | 3.80kW | 95.4% | A [#] |
| 615-285 | Matt Black | Tracery | - | Electric | - | 2.00kW | - | - |

Gas & Electric Huntingdon 30 Clear Door

| | | | | | | | | |
|---------|------------|-------|--------------|----------|--------|--------|-------|----------------|
| 515-009 | Matt Black | Clear | Conventional | Nat Gas | 4.55kW | 3.10kW | 75% | E |
| 515-453 | Matt Black | Clear | Conventional | LPG | 4.35kW | 3.00kW | 75% | E |
| 515-139 | Matt Black | Clear | Balanced | Nat Gas | 4.30kW | 3.70kW | 95.4% | A [#] |
| 515-726 | Matt Black | Clear | Balanced | LPG | 4.30kW | 3.80kW | 95.4% | A [#] |
| 615-094 | Matt Black | Clear | - | Electric | - | 2.00kW | - | - |

When upgraded with a Programmable Thermostatic Control (8456)




Electric Huntingdon 30 in Matt Black.

Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Huntingdon 40 Gas and Electric

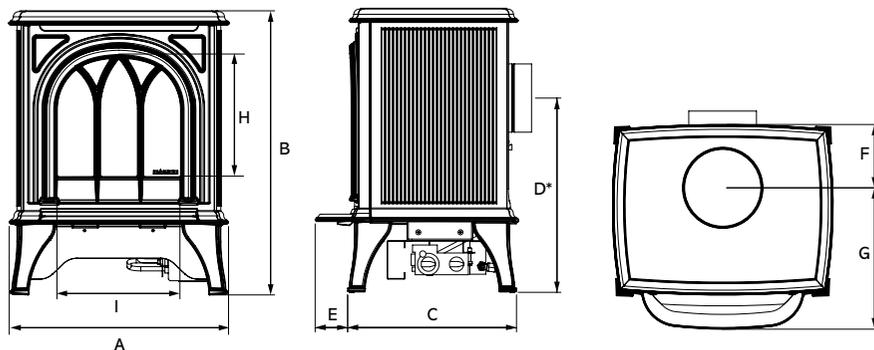

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

*Huntingdon 20 Balanced Flue is Rear Exit only.

Dimensions (mm)

| | A | B | C | D | E | F | G | H | I | Weight |
|-------------------------------|-----|-----|-----|-----|----|-----|-----|-----|-----|--------|
| Huntingdon 40 Gas (CF) | 641 | 653 | 382 | 460 | 99 | 154 | 350 | 265 | 402 | 71kg |
| Huntingdon 40 Gas (BF) | 641 | 653 | 382 | 510 | 99 | 183 | 321 | 265 | 402 | 75kg |
| Huntingdon 40 Electric | 641 | 653 | 397 | - | 99 | - | - | 265 | 402 | 59.5kg |

Remote Controls for Gas Huntingdon 40

| | Product Code |
|------------------------------------------------------|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |

Stove Flue Pipe and Collars

| | |
|-------------------------------------------------------|----------------|
| 1' Straight pipe, Matt Black | 4500 |
| 2' Straight pipe, Matt Black | 4501 |
| 3' Straight pipe, Matt Black | 4502 |
| 90° long 'elbow' adaptor (9" projection), Matt Black | 4514 |
| Matt Black Flue collar, Conventional Flue, Huntingdon | 999-010 |
| Matt Black Flue collar, Balanced Flue, Huntingdon | 999-347 |

Stove Flue Pipe Balanced flue versions of the Gas Huntingdon 40 must only use the 6" stainless steel flue provided. For additional Matt Black flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" Matt Black enamelled stove pipe with the conventional flue version.

Gas & Electric Huntingdon 40 Tracery Door

| Product Code | Colour | Door Style | Flue Type | Fuel Type | Heat Input | Heat Output | Efficiency | Energy Efficiency Class |
|--------------|------------|------------|--------------|-----------|------------|-------------|------------|-------------------------|
| ⊗ 515-161 | Matt Black | Tracery | Conventional | Nat Gas | 6.60kW | 4.60kW | 78% | E |
| ⊗ 515-565 | Matt Black | Tracery | Conventional | LPG | 6.70kW | 4.80kW | 78% | E |
| ⊗ 515-224 | Matt Black | Tracery | Balanced | Nat Gas | 6.60kW | 5.40kW | 90.8% | B [#] |
| ⊗ 515-628 | Matt Black | Tracery | Balanced | LPG | 6.60kW | 5.50kW | 90.8% | B [#] |
| ⊗ 615-302 | Matt Black | Tracery | - | Electric | - | 2.00kW | - | - |

Gas & Electric Huntingdon 40 Clear Door

| | | | | | | | | |
|-----------|------------|-------|--------------|----------|--------|--------|-------|----------------|
| ⊗ 515-188 | Matt Black | Clear | Conventional | Nat Gas | 6.60kW | 4.60kW | 78% | E |
| ⊗ 515-592 | Matt Black | Clear | Conventional | LPG | 6.70kW | 4.80kW | 78% | E |
| ⊗ 515-251 | Matt Black | Clear | Balanced | Nat Gas | 6.60kW | 5.40kW | 90.8% | B [#] |
| ⊗ 515-673 | Matt Black | Clear | Balanced | LPG | 6.60kW | 5.50kW | 90.8% | B [#] |
| ⊗ 615-123 | Matt Black | Clear | - | Electric | - | 2.00kW | - | - |

When upgraded with a Programmable Thermostatic Control (8456)




Electric Huntingdon 40 in Matt Black.

Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Vogue Gas and Electric

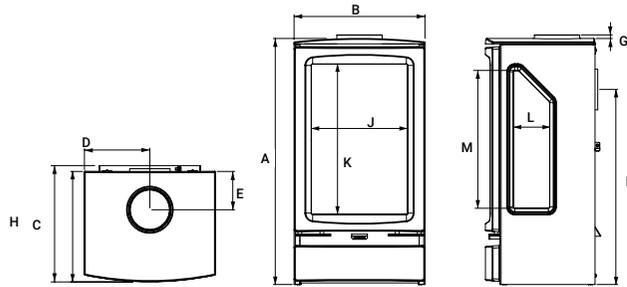

Recommended clearances between stove and other surfaces: top 225mm, sides 150mm rear must be a minimum of 50mm.

The complete range of Gas Vogue stoves have a choice of top or rear flue exit.

Stove Benches Vogue stoves can also be placed on one of our stove benches. Please see page 76 for further information.

Vogue Midi Gas & Electric Dimensions (mm)

| | A | B | C | D | E | F | G | H | J | K | L | M | Weight |
|-----------------------------|-----|-----|-----|-----|-----|-----|----|---|-----|-----|---|---|--------|
| Vogue Gas Midi (CF) | 639 | 416 | 348 | 208 | 121 | 478 | 11 | - | 306 | 337 | - | - | 42kg |
| Vogue Gas Midi (BF) | 639 | 416 | 348 | 208 | 137 | 470 | 11 | - | 306 | 337 | - | - | 40kg |
| Vogue Gas Midi Midline (CF) | 791 | 416 | 348 | 208 | 121 | 630 | 11 | - | 306 | 337 | - | - | 47kg |
| Vogue Gas Midi Midline (BF) | 791 | 416 | 348 | 208 | 137 | 622 | 11 | - | 306 | 337 | - | - | 47kg |
| Vogue Electric Midi | 639 | 416 | 348 | - | - | - | - | - | 306 | 337 | - | - | 42kg |
| Vogue Electric Midi Midline | 791 | 416 | 348 | - | - | - | - | - | 306 | 337 | - | - | 48kg |

Vogue Midi T Gas & Electric Dimensions (mm)

| | A | B | C | D | E | F | G | H | J | K | L | M | |
|------------------------------------|-----|-----|------|-----|-----|-----|----|-----|-----|-----|-----|-----|------|
| Vogue Gas Midi T (CF) | 776 | 416 | 348 | 208 | 121 | 615 | 11 | 367 | 306 | 475 | 115 | 434 | 54kg |
| Vogue Gas Midi T (BF) | 776 | 416 | 348 | 209 | 137 | 607 | 11 | - | 306 | 475 | 115 | 434 | 55kg |
| Vogue Gas Midi T Midline (CF) | 928 | 416 | 348 | 208 | 121 | 767 | 11 | 367 | 306 | 475 | 115 | 434 | 61kg |
| Vogue Gas Midi T Midline (BF) | 928 | 416 | 348 | 209 | 137 | 759 | 11 | - | 306 | 475 | 115 | 434 | 62kg |
| Vogue Gas Midi T Wall Mounted (BF) | 776 | 416 | 348* | 209 | 137 | - | 11 | - | 306 | 475 | 115 | 434 | 62kg |
| Vogue Electric Midi T | 776 | 418 | 349 | - | - | - | - | - | 306 | 475 | 115 | 434 | 38kg |
| Vogue Electric Midi T Midline | 928 | 418 | 349 | - | - | - | - | - | 306 | 475 | 115 | 434 | 44kg |
| Vogue Electric Midi T Wall Mounted | 776 | 416 | 348* | - | - | - | - | - | 306 | 475 | 115 | 434 | 44kg |

*360mm Depth when fitted with wall bracket

Options for Gas Vogue

| | Product Code |
|------------------------------------------------------|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |
| Linerless Flue Kit | 8736 |

Vogue Midi Gas & Electric

| Product Code | Model | Flue Type | Fuel Type | Heat Input | Heat Output | Efficiency | Energy Efficiency Class |
|--------------|-----------------------|--------------|-----------|------------|-------------|------------|-------------------------|
| ⊗ 563-123 | Midi | Conventional | Nat.Gas | 6.20kW | 4.20kW | 76% | E |
| ⊗ 563-426 | Midi | Conventional | LPG | 6.20kW | 4.30kW | 76% | E |
| ⊗ 563-016 | Midi | Balanced | Nat.Gas | 4.80kW | 3.90kW | 90.6% | B# |
| ⊗ 563-400 | Midi | Balanced | LPG | 4.80kW | 4.00kW | 90.6% | B# |
| ⊗ 563-392 | Midi Midline | Conventional | Nat.Gas | 6.20kW | 4.20kW | 76% | E |
| ⊗ 563-466 | Midi Midline | Conventional | LPG | 6.20kW | 4.30kW | 76% | E |
| ⊗ 563-258 | Midi Midline | Balanced | Nat.Gas | 4.80kW | 3.90kW | 90.6% | B# |
| ⊗ 563-790 | Midi Midline | Balanced | LPG | 4.80kW | 4.00kW | 90.6% | B# |
| ⊗ 663-806 | Midi Electric | - | Electric | - | 1.50kW | - | - |
| ⊗ 663-834 | Midi Midline Electric | - | Electric | - | 1.50kW | - | - |

Vogue Midi T Gas & Electric (3 Sided)

| | | | | | | | |
|-----------|----------------------------------------|--------------|----------|--------|--------|-------|----|
| ⊗ 563-180 | Midi T, 3 Sided | Conventional | Nat.Gas | 6.20kW | 4.40kW | 78% | E |
| ⊗ 563-701 | Midi T, 3 Sided | Conventional | LPG | 5.90kW | 4.20kW | 78% | E |
| ⊗ 563-025 | Midi T, 3 Sided | Balanced | Nat.Gas | 5.70kW | 4.80kW | 94.3% | A# |
| ⊗ 563-749 | Midi T, 3 Sided | Balanced | LPG | 5.00kW | 4.30kW | 94.3% | A# |
| ⊗ 563-224 | Midi T Midline, 3 Sided | Conventional | Nat.Gas | 6.20kW | 4.40kW | 78% | E |
| ⊗ 563-493 | Midi T Midline, 3 Sided | Conventional | LPG | 5.90kW | 4.20kW | 78% | E |
| ⊗ 563-300 | Midi T Midline, 3 Sided | Balanced | Nat.Gas | 5.70kW | 4.80kW | 94.3% | A# |
| ⊗ 563-676 | Midi T Midline, 3 Sided | Balanced | LPG | 5.00kW | 4.30kW | 94.3% | A# |
| 563-013 | Midi T, 3 Sided, Wall Mounted | Balanced | Nat.Gas | 5.70kW | 4.80kW | 94.3% | A# |
| 563-506 | Midi T, 3 Sided, Wall Mounted | Balanced | LPG | 5.00kW | 4.30kW | 94.3% | A# |
| ⊗ 663-819 | Midi T Electric, 3 Sided | - | Electric | - | 1.50kW | - | - |
| ⊗ 663-851 | Midi T Midline Electric, 3 Sided | - | Electric | - | 1.50kW | - | - |
| ⊗ 663-860 | Midi T Electric, Wall Mounted, 3 Sided | - | Electric | - | 1.50kW | - | - |

When upgraded with a Programmable Thermostatic Control (8456)

Stove Flue Pipe

| | Product Code |
|------------------------------------------------------|--------------|
| 1' Straight pipe, Matt Black | 4500 |
| 2' Straight pipe, Matt Black | 4501 |
| 3' Straight pipe, Matt Black | 4502 |
| 90° long 'elbow' adaptor (9" projection), Matt Black | 4514 |


Stove Flue Pipe Balanced flue versions of the Gas Vogue Midi and Midi T must only use the 6" stainless steel flue provided. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version of the Gas Vogue Midi and Midi T.

** Whilst Stocks Last

Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Vision Gas and Electric

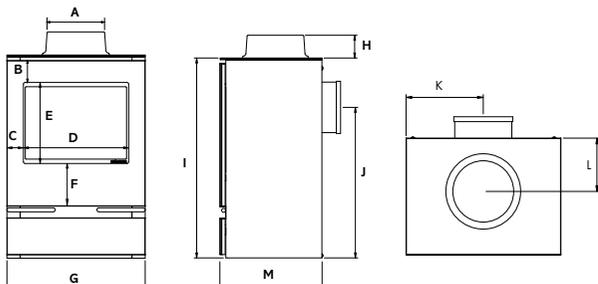

Recommended clearances between stove and other surfaces: top 225mm, sides 150mm and rear 50mm.

Stove Benches Vision stoves can also be placed on one of our stove benches. Please see page 76 for further information.

* Small balanced flue models are rear flue exit only

Dimensions (mm)

| | A | B | C | D | E | F | G | H | I | J | K | L | M | Weight |
|------------------------|-----|----|----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|--------|
| Small Gas (CF) | 143 | 57 | 58 | 254 | 240 | 122 | 370 | 43 | 529 | 359 | 185 | 97 | 289 | 33kg |
| Small Gas (BF)* | - | 57 | 58 | 254 | 240 | 122 | 370 | - | 529 | 379 | 185 | - | 289 | 33kg |
| Midi Gas (CF) | 143 | 65 | 50 | 316 | 241 | 127 | 415 | 43 | 605 | 436 | 208 | 96 | 311 | 39kg |
| Midi Gas (BF) | 173 | 65 | 50 | 316 | 241 | 127 | 415 | 69 | 605 | 456 | 208 | 142 | 311 | 41kg |
| Medium Gas (CF) | 143 | 77 | 64 | 408 | 274 | 150 | 535 | 43 | 677 | 487 | 268 | 100 | 353 | 45kg |
| Medium Gas (BF) | 173 | 77 | 64 | 408 | 274 | 150 | 535 | 69 | 677 | 538 | 268 | 139 | 353 | 55kg |
| Small Electric | - | 57 | 58 | 254 | 240 | 122 | 370 | - | 555 | - | - | - | 299 | 24kg |
| Midi Electric | - | 65 | 50 | 316 | 241 | 127 | 415 | - | 604 | - | - | - | 320 | 28kg |
| Medium Electric | - | 77 | 64 | 408 | 274 | 152 | 535 | - | 676 | - | - | - | 363 | 38kg |

Remote Controls

| | Product Code |
|------------------------------------------------------|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |

Stove Flue Pipe

| | |
|------------------------------------------------------|-------------|
| 1' Straight pipe, Matt Black | 4500 |
| 2' Straight pipe, Matt Black | 4501 |
| 3' Straight pipe, Matt Black | 4502 |
| 90° long 'elbow' adaptor (9" projection), Matt Black | 4514 |

Stove Flue Pipe Balanced flue versions of the Gas Visions must only use the 6" stainless steel or anthracite flue pipe. For the conventional flue version of the Gas Vision Gazco recommends the use of 5" matt black or gloss enamelled stove pipe.

| Product Code | Model | Flue Type | Fuel Type | Flue Exit | Heat Input (kW) | Heat Output (kW) | Efficiency | Energy Efficiency Class |
|------------------|-------|--------------|-----------|-----------|-----------------|------------------|------------|-------------------------|
| ⊗ 526-013 | Small | Conventional | Nat. Gas | Rear | 3.30 | 2.30 | 76% | E |
| ⊗ 526-643 | Small | Conventional | LPG | Rear | 3.20 | 2.20 | 76% | E |
| ⊗ 526-021 | Small | Conventional | Nat Gas | Top | 3.30 | 2.30 | 76% | E |
| ⊗ 526-656 | Small | Conventional | LPG | Top | 3.20 | 2.20 | 76% | E |
| ⊗ 526-046 | Small | Balanced | Nat. Gas | Rear | 3.20 | 2.50 | 85.1% | C# |
| ⊗ 526-405 | Small | Balanced | LPG | Rear | 3.10 | 2.40 | 85.1% | C# |

Gas Vision Midi

| | | | | | | | | |
|------------------|------|--------------|----------|------|------|------|-------|----|
| ⊗ 526-065 | Midi | Conventional | Nat.Gas | Rear | 4.55 | 3.10 | 75% | E |
| ⊗ 526-417 | Midi | Conventional | LPG | Rear | 4.35 | 3.00 | 75% | E |
| ⊗ 526-077 | Midi | Conventional | Nat.Gas | Top | 4.55 | 3.10 | 75% | E |
| ⊗ 526-440 | Midi | Conventional | LPG | Top | 4.35 | 3.00 | 75% | E |
| ⊗ 526-100 | Midi | Balanced | Nat. Gas | Rear | 4.30 | 3.70 | 95.4% | A# |
| ⊗ 526-471 | Midi | Balanced | LPG | Rear | 4.30 | 3.80 | 95.4% | A# |
| ⊗ 526-109 | Midi | Balanced | Nat. Gas | Top | 4.30 | 3.70 | 95.4% | A# |
| ⊗ 526-486 | Midi | Balanced | LPG | Top | 4.30 | 3.80 | 95.4% | A# |

Gas Vision Medium

| | | | | | | | | |
|------------------|--------|--------------|----------|------|------|------|-------|----|
| ⊗ 526-122 | Medium | Conventional | Nat.Gas | Rear | 6.60 | 4.60 | 78% | E |
| ⊗ 526-515 | Medium | Conventional | LPG | Rear | 6.70 | 4.80 | 78% | E |
| ⊗ 526-137 | Medium | Conventional | Nat.Gas | Top | 6.60 | 4.60 | 78% | E |
| ⊗ 526-539 | Medium | Conventional | LPG | Top | 6.70 | 4.80 | 78% | E |
| ⊗ 526-155 | Medium | Balanced | Nat. Gas | Rear | 6.60 | 5.40 | 90.8% | B# |
| ⊗ 526-580 | Medium | Balanced | LPG | Rear | 6.60 | 5.50 | 90.8% | B# |
| ⊗ 526-176 | Medium | Balanced | Nat Gas | Top | 6.60 | 5.40 | 90.8% | B# |
| ⊗ 526-612 | Medium | Balanced | LPG | Top | 6.60 | 5.50 | 90.8% | B# |

Electric Vision


| | | | | | | | | |
|------------------|--------|---|----------|---|---|------|---|---|
| ⊗ 634-808 | Small | - | Electric | - | - | 2.00 | - | - |
| ⊗ 634-846 | Midi | - | Electric | - | - | 2.00 | - | - |
| ⊗ 634-889 | Medium | - | Electric | - | - | 2.00 | - | - |

When upgraded with a Programmable Thermostatic Control (8456)

Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Loft Gas

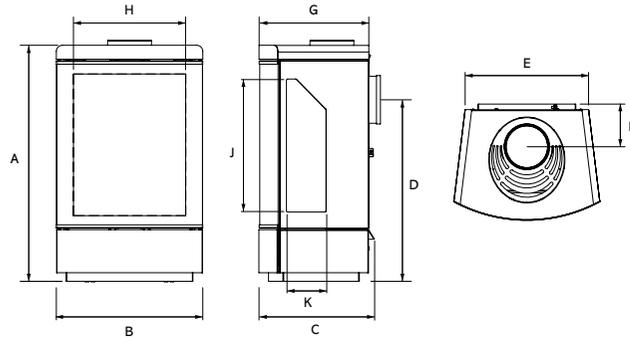

Recommended clearances between stove and other surfaces: top 225mm, sides 200mm, rear must be a minimum of 50mm.

| Dimensions (mm) | A | B | C | D | E | F | G | H | J | K |
|-----------------------------------|------|-----|-----|-----------------|-----|-----------------|-----|-----|-----|-----|
| Loft | 770 | 481 | 379 | CF:600 / BF:592 | 406 | CF:139 / BF:137 | 359 | 369 | 434 | 130 |
| Loft with Plinth | 815 | 481 | 379 | CF:646 / BF:638 | 406 | CF:139 / BF:137 | 359 | 369 | 434 | 130 |
| Loft with Top Section | 1412 | 481 | 379 | CF:600 / BF:592 | 406 | CF:139 / BF:137 | 359 | 369 | 434 | 130 |
| Loft with Plinth & Top Section | 1457 | 481 | 379 | CF:646 / BF:638 | 406 | CF:139 / BF:137 | 359 | 369 | 434 | 130 |
| Loft with Log Store | 1152 | 481 | 379 | CF:982 / BF:974 | 406 | CF:139 / BF:137 | 359 | 369 | 434 | 130 |
| Loft with Log Store & Top Section | 1793 | 481 | 379 | CF:982 / BF:974 | 406 | CF:139 / BF:137 | 359 | 369 | 434 | 130 |
| Loft Wall Mounted | 770 | 481 | 399 | BF:592 | 406 | BF:137 | 359 | 369 | 434 | 130 |
| Loft Wall Mounted & Top Section | 1412 | 480 | 399 | BF:592 | 406 | BF:137 | 359 | 369 | 434 | 130 |

| Product Code | Flue Type | Fuel Type | Heat Input | Heat Output | Efficiency | Energy Efficiency Class | Weight |
|--------------|--------------|-----------|------------|-------------|------------|-------------------------|--------|
| ⊗ 548-006 | Conventional | Nat.Gas | 6.20kW | 4.40kW | 78% | D | 56kg |
| ⊗ 548-443 | Conventional | LPG | 5.90kW | 4.20kW | 78% | D | 56kg |
| ⊗ 548-032 | Balanced | Nat.Gas | 5.30kW | 4.50kW | 94.3% | A | 60kg |
| ⊗ 548-457 | Balanced | LPG | 4.80kW | 4.20kW | 94.3% | A | 60kg |

Styling Options

| | |
|---------|--------------------------------------|
| 948-191 | Loft - Wall Mounting Kit |
| 948-016 | Loft Plinth - Steel Graphite |
| 948-030 | Loft Log Store - Steel Graphite |
| 948-041 | Loft Top Section - Steel Graphite |
| 948-077 | Loft Plinth - Woodgrain Sandstone |
| 948-102 | Loft Plinth - Castillo Sandstone |
| 948-083 | Loft Log Store - Woodgrain Sandstone |
| 948-110 | Loft Log Store - Castillo Sandstone |

Stove Benches Loft stoves can also be placed on one of our stove benches. Please see page 76 for further information.

Accessories

| | |
|---------|-----------------------------|
| 999-620 | Remote System Mains Adaptor |
| 8736 | Linerless Flue Kit |

Stove Flue Pipe

| | |
|------|------------------------------------------|
| 4500 | 1' Straight pipe |
| 4501 | 2' Straight pipe |
| 4502 | 3' Straight pipe |
| 4514 | 90° Long 'elbow' adaptor (9" projection) |

Stove Flue Pipe Balanced flue versions of the Loft must only use the 6" stainless steel flue provided. Gazco recommends the use of 5" matt black enamelled stove pipe with the conventional flue version of the Loft.




Loft with Steel Log Store Base

Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

CL3, CL5 & CL8 Gas and Electric

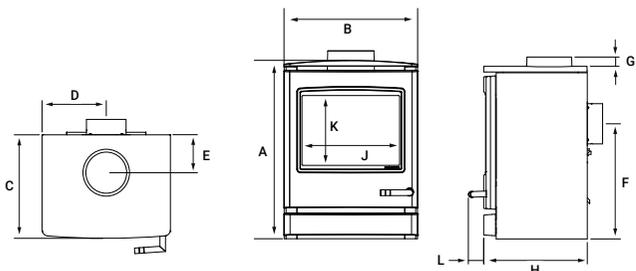

Recommended clearances between stove and other surfaces: top 225mm, sides 150mm rear must be a minimum of 50mm.

The complete range of CL stoves have a choice of top or rear flue exit.[^]

Stove Benches CL stoves can also be placed on one of our stove benches. Please see page 76 for further information.

CL3, CL5 & CL8 Gas & Electric Dimensions (mm)

| | A | B | C | D | E | F | G | H | J | K | L | Weight |
|---------------------------------|-----|-----|-----|-------|-----|-----|----|-----|-----|-----|----|--------|
| CL3 Gas (CF) | 541 | 371 | 313 | 185.5 | 99 | 359 | 30 | 313 | 252 | 243 | 49 | 42kg |
| CL3 Gas (BF)[^] | 541 | 371 | 313 | 185.5 | 99 | 379 | 30 | 313 | 252 | 243 | 49 | 42kg |
| CL5 Gas(CF) | 551 | 416 | 333 | 208 | 122 | 368 | 30 | 333 | 314 | 244 | 49 | 47kg |
| CL5 Gas (BF) | 551 | 416 | 333 | 208 | 142 | 388 | 35 | 333 | 314 | 244 | 49 | 47kg |
| CL8 Gas (CF) | 604 | 553 | 365 | 277 | 99 | 411 | 20 | 364 | 427 | 274 | 48 | 50kg |
| CL8 Gas (BF) | 604 | 553 | 365 | 277 | 129 | 462 | 51 | 364 | 427 | 274 | 48 | 60kg |
| CL3 Electric | 541 | 371 | 313 | - | - | - | - | - | 252 | 244 | - | 40kg |
| CL3 Electric | 552 | 416 | 333 | - | - | - | - | - | 311 | 244 | - | 44kg |
| CL5 Electric | 604 | 553 | 374 | - | - | - | - | - | 247 | 274 | - | 47kg |

[^] Small balanced flue models are rear flue exit only

Options for CL Gas stoves

| | Product Code |
|------------------------------------------------------|--------------|
| Standard Upgradeable Remote Control | 8455 |
| Programmable Thermostatic Upgradeable Remote Control | 8456 |


| Product Code | Model | Colour | Flue Type | Fuel Type | Fuel Exit | Heat Input | Heat Output | Efficiency | Energy Efficiency Class |
|--------------------|-------|------------|--------------|-----------|-----------|------------|-------------|------------|-------------------------|
| ⊗ YM581-003 | CL3 | Matt Black | Conventional | Nat. Gas | Rear | 3.30kW | 2.30kW | 76% | E |
| ⊗ YM581-409 | CL3 | Matt Black | Conventional | LPG | Rear | 3.20kW | 2.20kW | 76% | E |
| ⊗ YM581-016 | CL3 | Matt Black | Conventional | Nat. Gas | Top | 3.30kW | 2.30kW | 76% | E |
| ⊗ YM581-427 | CL3 | Matt Black | Conventional | LPG | Top | 3.20kW | 2.20kW | 76% | E |
| ⊗ YM581-038 | CL3 | Matt Black | Balanced | Nat. Gas | Rear | 3.20kW | 2.50kW | 85.10% | C* |
| ⊗ YM581-443 | CL3 | Matt Black | Balanced | LPG | Rear | 3.10kW | 2.40kW | 85.10% | C* |
| ⊗ YM581-059 | CL5 | Matt Black | Conventional | Nat. Gas | Rear | 4.55kW | 3.10kW | 75% | E |
| ⊗ YM581-460 | CL5 | Matt Black | Conventional | LPG | Rear | 4.35kW | 3.00kW | 75% | E |
| ⊗ YM581-090 | CL5 | Matt Black | Conventional | Nat. Gas | Top | 4.55kW | 3.10kW | 75% | E |
| ⊗ YM581-484 | CL5 | Matt Black | Conventional | LPG | Top | 4.35kW | 3.00kW | 75% | E |
| ⊗ YM581-100 | CL5 | Matt Black | Balanced | Nat. Gas | Rear | 4.30kW | 3.70kW | 95.40% | A* |
| ⊗ YM581-503 | CL5 | Matt Black | Balanced | LPG | Rear | 4.30kW | 3.80kW | 95.40% | A* |
| ⊗ YM581-114 | CL5 | Matt Black | Balanced | Nat. Gas | Top | 4.30kW | 3.70kW | 95.40% | A* |
| ⊗ YM581-536 | CL5 | Matt Black | Balanced | LPG | Top | 4.30kW | 3.80kW | 95.40% | A* |
| ⊗ YM581-126 | CL8 | Matt Black | Conventional | Nat. Gas | Rear | 6.60kW | 4.60kW | 78.0% | E |
| ⊗ YM581-567 | CL8 | Matt Black | Conventional | LPG | Rear | 6.70kW | 4.80kW | 78.0% | E |
| ⊗ YM581-141 | CL8 | Matt Black | Conventional | Nat. Gas | Top | 6.60kW | 4.60kW | 78.0% | E |
| ⊗ YM581-588 | CL8 | Matt Black | Conventional | LPG | Top | 6.70kW | 4.80kW | 78.0% | E |
| ⊗ YM581-174 | CL8 | Matt Black | Balanced | Nat. Gas | Rear | 6.80kW | 5.40kW | 90.8% | B* |
| ⊗ YM581-601 | CL8 | Matt Black | Balanced | LPG | Rear | 6.80kW | 5.40kW | 90.8% | B* |
| ⊗ YM581-207 | CL8 | Matt Black | Balanced | Nat. Gas | Top | 6.80kW | 5.40kW | 90.8% | B* |
| ⊗ YM581-654 | CL8 | Matt Black | Balanced | LPG | Top | 6.80kW | 5.50kW | 90.8% | B* |
| ⊗ YM681-196 | CL3 | Matt Black | - | Electric | - | - | 2.00kW | - | - |
| ⊗ YM681-331 | CL5 | Matt Black | - | Electric | - | - | 2.00kW | - | - |
| ⊗ YM681-374 | CL8 | Matt Black | - | Electric | - | - | 2.00kW | - | - |

* When upgraded with a Programmable Thermostatic Control (8456)

Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Liberty 85 Electric

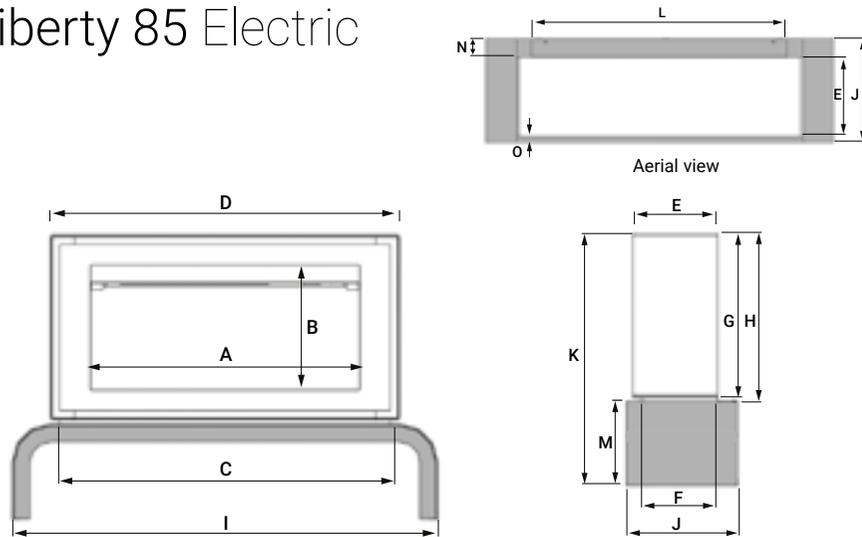

Liberty 85 Electric Dimensions (mm)

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O |
|--------------------------------------|-----|-----|------|------|-----|-----|-----|-----|------|-----|-----|-----|-----|----|-----|
| Liberty 85 on Bench | 855 | 396 | 1050 | 1110 | 300 | 275 | 584 | 596 | 1350 | 396 | 896 | 991 | 300 | 71 | 27 |
| Liberty 85 on Plinth | 855 | 396 | 1050 | 1110 | 300 | 275 | 584 | 596 | 1305 | 585 | 649 | 991 | 53 | 71 | 114 |
| Liberty 85 (without Plinth or Bench) | 855 | 396 | 1050 | 1110 | 300 | 275 | 584 | 596 | - | - | - | - | - | - | - |

| Product Code | Model | Colour | Fuel Type | Heat Output (kW) |
|--------------|--------------------|---------------|-----------|------------------|
| ⊗ 610-107 | Liberty 85 - Black | Black (front) | Electric | 2.00 |
| ⊗ 610-126 | Liberty 85 - White | White (front) | Electric | 2.00 |

Plinth & Bench Mounting Choice

| | |
|---------|---------------------------|
| 999-048 | Liberty 85 Plinth - Black |
| 999-087 | Liberty 85 Plinth - White |
| 999-127 | Liberty 85 Bench - Black |
| 999-166 | Liberty 85 Bench - White |

Stove Benches Liberty 85 stoves can also be placed on some of our stove benches. Please see page 76 for further information.




Liberty 85 Electric in Black with Log & Pebble fuel effect and Amber flame setting

Technical Information


The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Studio Freestanding 1 Gas

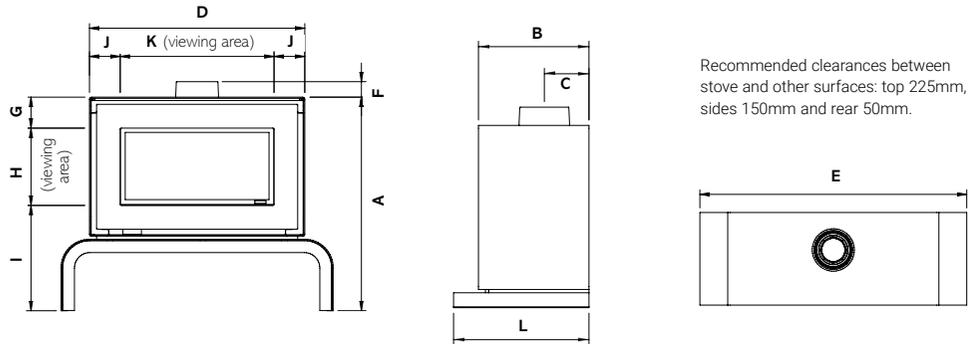

| Dimensions (mm) | A | B | C | D | E | F | G | H | I | J | K | L | Weight |
|----------------------------------------|-----|-----|--------------------|-----|------|------------------|-----|-----|-----|-----|-----|-----|---------|
| Studio 1 Freestanding on Bench | 896 | 396 | CF: 148 BF: 160 | 910 | 1150 | CF: 43 BF: 65 | 130 | 324 | 442 | 130 | 650 | - | 146kg |
| Studio 1 Freestanding on Plinth | 649 | 396 | CF: 148 BF: 160 | 910 | 1105 | CF: 43 BF: 65 | 130 | 324 | 195 | 130 | 650 | 485 | 141.5kg |

Studio Freestanding 2 Gas

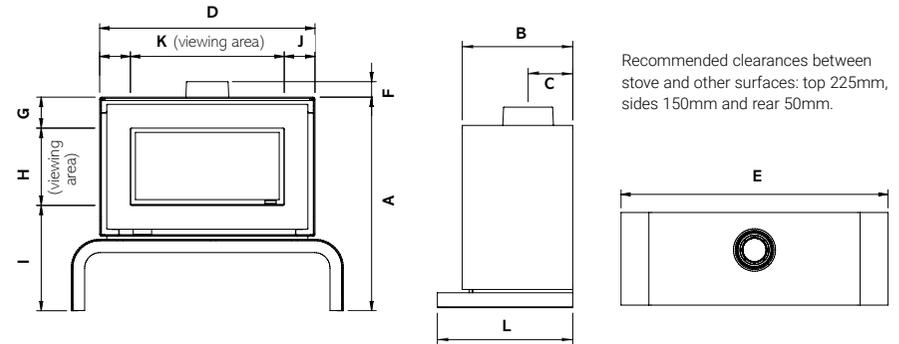

| Dimensions (mm) | A | B | C | D | E | F | G | H | I | J | K | L | Weight |
|----------------------------------------|-----|-----|--------------------|------|------|------------------|-----|-----|-----|-----|-----|-----|---------|
| Studio 2 Freestanding on Bench | 896 | 396 | CF: 148 BF: 160 | 1110 | 1350 | CF: 43 BF: 65 | 130 | 324 | 442 | 130 | 850 | - | 148kg |
| Studio 2 Freestanding on Plinth | 649 | 396 | CF: 148 BF: 160 | 1110 | 1305 | CF: 43 BF: 65 | 130 | 324 | 195 | 130 | 850 | 485 | 143.5kg |

| Product Code | Finish | Flue Type | Fuel Effect | Lining | Fuel Type | Heat Input (kW) | Heat Output (kW) | Efficiency | Energy Efficiency Class |
|----------------|--------|--------------|-------------|-------------|-----------|-----------------|------------------|------------|-------------------------|
| 508-147 | Black | Conventional | Logs | Black Glass | Nat. Gas | 6.30 | 4.10 | 72% | E |
| 508-589 | Black | Conventional | Logs | Black Glass | LPG | 6.90 | 4.60 | 72% | E |
| 508-248 | Black | Balanced | Logs | Black Glass | Nat. Gas | 6.30 | 5.20 | 92% | A |
| 508-597 | Black | Balanced | Logs | Black Glass | LPG | 6.30 | 5.30 | 92% | A |

| Product Code | Finish | Flue Type | Fuel Effect | Lining | Fuel Type | Heat Input (kW) | Heat Output (kW) | Efficiency | Energy Efficiency Class |
|----------------|--------|--------------|-------------|-------------|-----------|-----------------|------------------|------------|-------------------------|
| 508-094 | Black | Conventional | Logs | Black Glass | Nat. Gas | 8.50 | 6.20 | 81% | C |
| 508-426 | Black | Conventional | Logs | Black Glass | LPG | 8.40 | 6.30 | 82% | C |
| 508-027 | Black | Balanced | Logs | Black Glass | Nat. Gas | 8.50 | 7.00 | 92% | A |
| 508-444 | Black | Balanced | Logs | Black Glass | LPG | 8.00 | 6.80 | 92% | A |

Plinth & Bench Mounting Choice (Required)

| | |
|-----------------|--------------------------------------|
| 999-022 | Studio 1 Freestanding Plinth - Black |
| 999-035* | Studio 1 Freestanding Plinth - White |
| 999-101 | Studio 1 Freestanding Bench - Black |
| 999-114* | Studio 1 Freestanding Bench - White |

Additional Lining Sets

| | |
|----------------|---------------------------------------|
| 923-010 | Studio 1 CF - Vermiculite Lining Set |
| 923-517 | Studio 1 CF - Black Reeded Lining Set |
| 923-433 | Studio 1 BF - Vermiculite Lining Set |
| 923-607 | Studio 1 BF - Black Reeded Lining Set |

Plinth & Bench Mounting Choice (Required)

| | |
|----------------|--------------------------------------|
| 999-048 | Studio 2 Freestanding Plinth - Black |
| 999-087 | Studio 2 Freestanding Plinth - White |
| 999-127 | Studio 2 Freestanding Bench - Black |
| 999-166 | Studio 2 Freestanding Bench - White |

Additional Lining Sets

| | |
|----------------|---------------------------------------|
| 923-337 | Studio 2 CF - Vermiculite Lining Set |
| 923-744 | Studio 2 CF - Black Reeded Lining Set |
| 923-938 | Studio 2 BF - Vermiculite Lining Set |
| 923-476 | Studio 2 BF - Black Reeded Lining Set |

Accessories

| | |
|----------------|-----------------------------|
| 999-620 | Remote System Mains Adaptor |
|----------------|-----------------------------|

*Whilst Stocks Last

Accessories

| | |
|----------------|-----------------------------|
| 999-620 | Remote System Mains Adaptor |
|----------------|-----------------------------|

Also Available from the Stovax Heating Group

Stovax Wood & Multi-fuel Stoves

Stovax, our solid fuel division, offer a huge range of beautiful stoves that burn wood and other solid fuels. Designed and engineered here in the UK, these appliances offer a natural and practical home heating solution.

Choose from a stunning range of modern and traditional styles in various sizes and heat outputs to suit your home. For more details speak with your local retailer or visit www.stovax.com.



Stovax Sheraton 5 woodburning stove shown with Cavendish Bolection Limestone mantel



Gazco eReflex 150RW with Oak Log effect, shown as a three-sided installation. Shown with optional Mood Lighting System.

Gazco Gas & Electric Fires

In addition to the wide selection of stoves shown in this brochure, Gazco also offers a number of gas and electric fires, which are covered in a separate dedicated brochures. Whether you want to achieve a contemporary look or traditional interior, Gazco has the perfect solution whatever your style or budget.

Ask your local retailer for more information or download the brochure from www.gazco.com.



Gazco Reflex 75T 3-Sided Gas fire

onyx

Luxury Fires and Stoves

In addition to the Gazco brand, the Stovax Heating Group is proud to offer a new and growing premium collection of fires and stoves from luxury brand, Onyx.

This showroom exclusive brand is available from a carefully selected group of Approved Onyx Retailers, and includes the Onyx Liv 3 gas stove. Offering a fully integrated control system, 180° views, and ultra-realistic flames, the Liv 3's elegant, curved design makes for the ultimate contemporary centrepiece to add poise and allure in the home.

To find out more about the Onyx brand and experience, visit www.onyxfires.com.



View the Video
onyxfires.com/liv3



Huntingdon 40 Gas in Matt Black



Vogue Midi T Midline Electric with Log & Pebble Fuel effects and Amber flame setting



Gazco Limited, Osprey Road, Sowton Industrial Estate, Exeter, Devon, England EX2 7JG

Trade Sales
Tel: 01392 261999
Email: info@gazco.com

Export Sales
Tel: +44 1392 261990
Email: exportsales@gazco.com



gazco.com



Gazco gratefully acknowledges the assistance of the following companies with photographic settings:
www.furniturevillage.co.uk; www.romo.com; www.debenhams.com; www.theorangerie.co.uk; www.justshutters.co.uk; www.homebase.co.uk; www.lauraashley.com; www.loaf.com
www.nestinteriors.com; www.graceandgloryhome.co.uk; www.stbridgetnurseseries.co.uk; www.johnlewis.com; www.wayfair.com; www.veryvintagehire.co.uk; www.carpetright.co.uk;
www.beachbros.co.uk; www.birlea.com; www.originalstyle.com; www.amtico.com; www.chunkymonkeyfurniture.co.uk; www.wallsandfloors.co.uk; www.desenio.co.uk; www.ikea.com;

Paper sourced from sustainable forests and printed using vegetable based inks • © All material copyright Gazco Ltd 2023 E & O E • A member of the Stovax group

Gazco pursue a policy of continuous product improvement, therefore, whilst our products are correct at the time of the photography, we reserve the right to make alterations and amendments. Exact product details should be discussed with your retailer at the time of purchase.

Find Your Local Expert Retailer

You can find your nearest retailer by visiting:
www.gazco.com/retailers



Your Gazco stockist:

Ref: STOV0123

